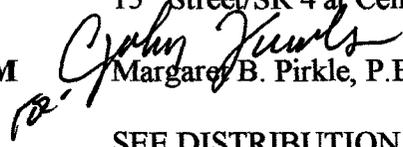


D.O.T. 66

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

FILE P.I. No. 0003790, Richmond County **OFFICE** Preconstruction
STP-0003-00(790)
15th Street/SR 4 at Central Avenue/CR 2207 **DATE** May 17, 2006

FROM  Margaret B. Pirkle, P.E., Assistant Director of Preconstruction

TO SEE DISTRIBUTION

SUBJECT APPROVED NOTICE OF LOCATION AND DESIGN

Attached for your further handling is the approved Location and Design Report on the above subject project.

Also attached is the Notice of Location and Design Approval. This is authorization for the District to proceed with advertisement.

MBP/cj

Attachment


DISTRIBUTION:

Brian Summers
Harvey Keeper
Jamie Simpson
Paul Liles
Keith Golden
Ken Thompson
Joe Palladi (file copy)
Babs Abubakari
Ben Buchan
Mike Thomas
BOARD MEMBER

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

FILE STP-0003-00(790), Richmond County OFFICE Urban Design
P. I. Number 0003790
15th Street SR4 @ Central Avenue CR2207 in Augusta
DATE May 3, 2006

FROM  James B. Buchan, P.E., State Urban Design Engineer

TO Meg Pirkle, P.E., Assistant Director of Preconstruction

SUBJECT Request for Location and Design Approval

Description and Project Proposal: The project consists of installing a traffic signal along with new signing and marking to provide improved safety and orderly progression of traffic through the intersection. The project is to extend approximately 350' west, 280' north, and 270' south of the existing intersection.

Concept Approval Date: 11/1/01


Environmental Assessment and Reassessment Approval Date: October 11, 2005

Consistency with Approved Planning:

The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: It is recommended that the location and design for the project be approved and that the attached Notice be approved for advertising.

RECOMMEND:

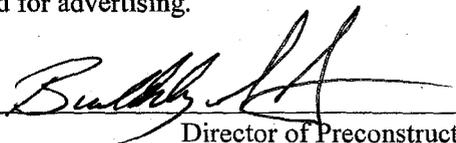
Director of Preconstruction

APPROVE:


Chief Engineer

5/10/06
Date of Approval

Attachments:

- Sketch Map
- Cost Estimate
- Notice of Location and Design Approval

NOTICE OF LOCATION AND DESIGN APPROVAL

**STP-0003-00(790), RICHMOND COUNTY
P. I. NUMBER 0003790**

Notice is hereby given in compliance with Georgia Code 22-2-109 that the Georgia Department of Transportation has approved the Location and Design of this project.

The date of location approval is May 17, 2006

This project is located at 15th Street/SR4 (Mile Post 23.53) @ Central Avenue/CR2207 in Augusta, Richmond County. The project will reside in the 87th Georgia Militia District.

The project consists of installing a traffic signal along with new signing and marking to provide improved safety and orderly progression of traffic through the intersection. The project is to extend approximately 350' west, 280' north, and 270' south of the existing intersection.

Drawings or maps or plats of the proposed project, as approved, are on file and are available for public inspection at the Georgia Department of Transportation:

Scott Stephens
Scott.stephens@dot.state.ga.us
4260 Frontage Road
Augusta, Georgia 30909
(706) 855-3466

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

James B. Buchan, P.E.
State Urban Design Engineer
Ben.buchan@dot.state.ga.us
No. 2 Capitol Square, S.W.
Atlanta, Georgia 30334
404-656-5436


Any written request or communication in reference to this project or notice should include the Project and P. I. Numbers as noted at the top of this notice.

PROJECT LOCATION MAP

STP-0003-00(790)

15th Street @ Central Avenue in Augusta

P.I. NO. 0003790

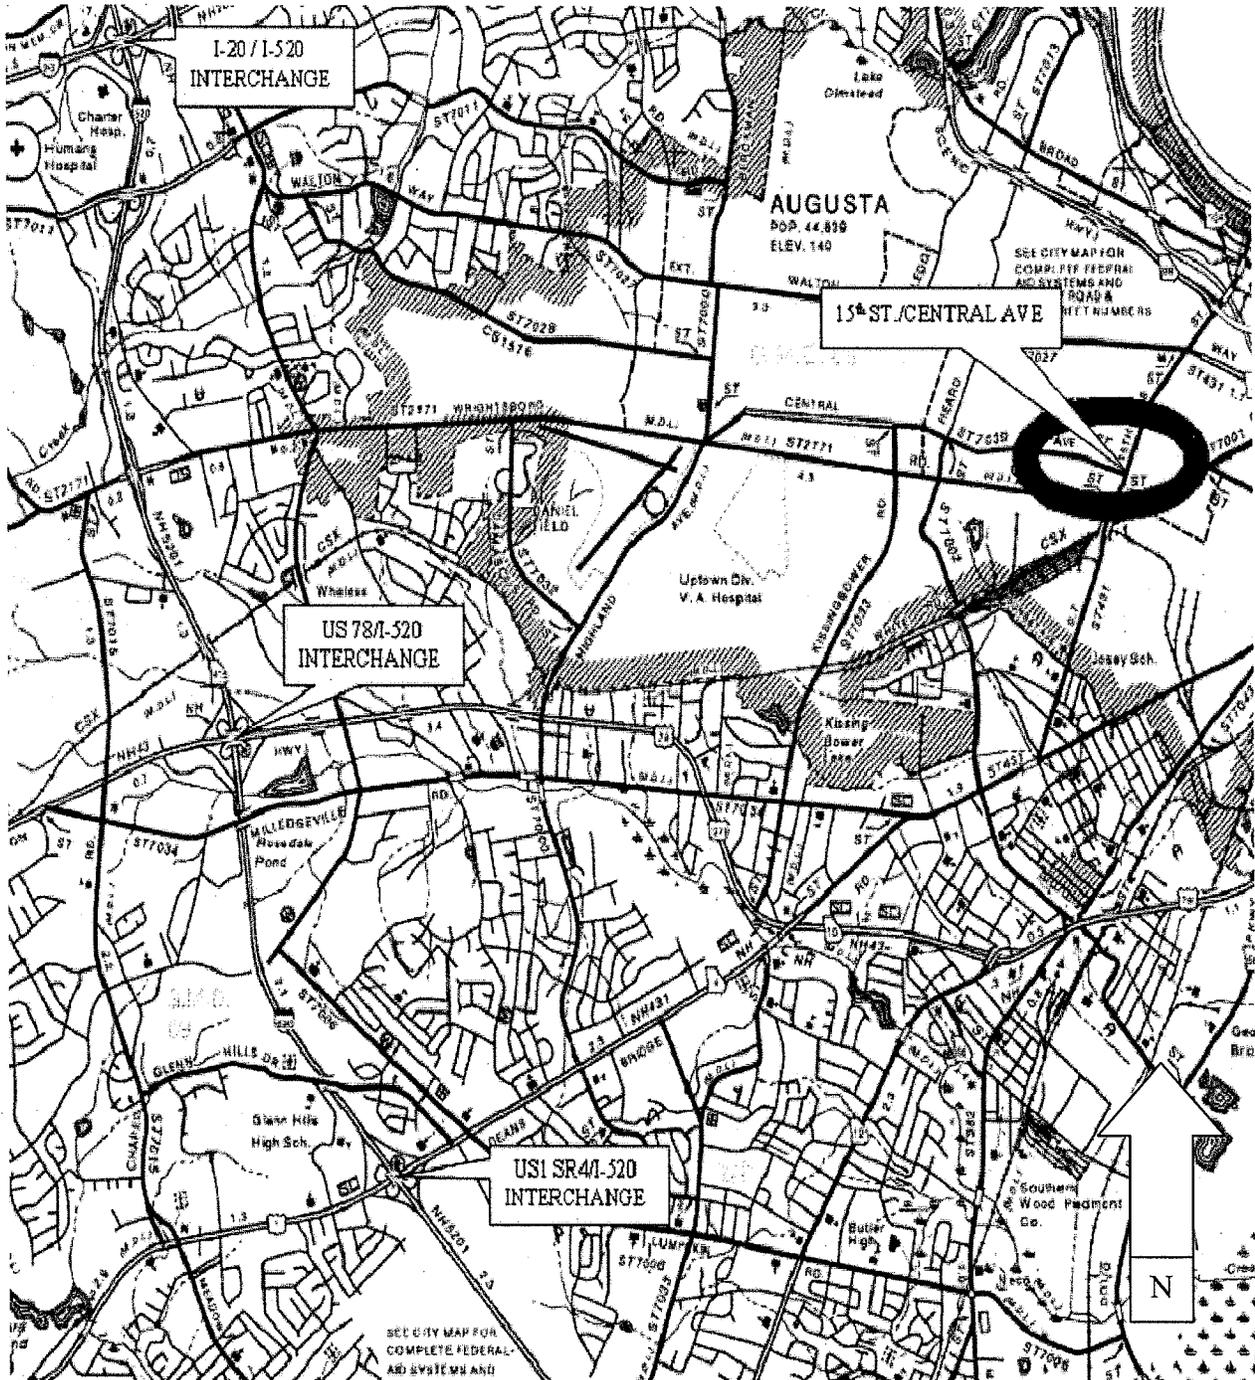

Estimate Report for file "0003790"

Section ROADWAY ITEMS

Item Number	Quantity	Units	Unit Price	Item Description	Cost
150-1000	1	LS	5000.00	TRAFFIC CONTROL - STP-0003-00(790)	5000.00
210-0100	1	LS	5000.00	GRADING COMPLETE - STP-0003-00(790)	5000.00
310-5080	19	SY	9.84	GR AGGR BASE CRS, 8 INCH, INCL MATL	186.96
402-1812	2	TN	40.17	RECYCLED ASPH CONC LEVELING, INCL BITUM MATL & H LIME	80.34
402-3121	4	TN	39.10	RECYCLED ASPH CONC 25 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	156.40
402-3131	194	TN	35.03	RECYCLED ASPH CONC 9.5 MM SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME	6795.82
402-3190	259	TN	43.18	RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	11183.62
413-1000	237	GL	0.87	BITUM TACK COAT	206.19
432-0206	2316	SY	0.90	MILL ASPH CONC PVMT, 1 1/2 IN DEPTH	2084.40
441-0104	343	SY	20.60	CONC SIDEWALK, 4 IN	7065.80
441-4030	13	SY	33.75	CONC VALLEY GUTTER, 8 IN	438.75
441-6012	208	LF	24.76	CONC CURB & GUTTER, 6 IN X 24 IN, TP 2	5150.08
446-3500	88	LF	1.60	HIGH STRENGTH PVMT REINF FABRIC -	140.80
500-9999	2	CY	148.07	CLASS B CONC, BASE OR PVMT WIDENING	296.14
634-1200	4	EA	78.78	RIGHT OF WAY MARKERS	315.12
Section Sub Total:					\$44,100.42

Section SIGNING & MARKING & SIGNAL ITEMS

Item Number	Quantity	Units	Unit Price	Item Description	Cost
636-1020	42	SF	13.15	HIGHWAY SIGNS, TP 1 MATL, REFL SHEETING, TP 3	552.30
636-1029	18	SF	19.94	HIGHWAY SIGNS, TP 2 MATL, REFL SHEETING, TP 3	358.92
639-3004	4	EA	7616.64	STEEL STRAIN POLE, TP IV	30466.56
647-1000	1	LS	47491.00	TRAFFIC SIGNAL INSTALLATION NO - 1	47491.00
647-2120	12	EA	333.13	PULL BOX, PB-2	3997.56
647-2140	1	EA	998.78	PULL BOX, PB-4	998.78
653-0120	4	EA	56.13	THERMOPLASTIC PVMT MARKING, ARROW, TP 2	224.52
653-1501	2060	LF	0.25	THERMOPLASTIC SOLID TRAF STRIPE, 5 IN, WHITE	515.00
653-1502	1120	LF	0.23	THERMOPLASTIC SOLID TRAF STRIPE, 5 IN, YELLOW	257.60
653-1704	80	LF	3.34	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	267.20
653-1804	480	LF	1.47	THERMOPLASTIC SOLID TRAF STRIPE, 8 IN, WHITE	705.60
653-3501	1850	GLF	0.13	THERMOPLASTIC SKIP TRAF STRIPE, 5 IN, WHITE	240.50
653-6006	1895	SY	2.53	THERMOPLASTIC TRAF STRIPING, YELLOW	4794.35
654-1001	16	EA	3.20	RAISED PVMT MARKERS TP 1	51.20
654-1003	24	EA	3.20	RAISED PVMT MARKERS TP 3	76.80
682-6219	20	LF	3.67	CONDUIT, NONMETL, TP 2, 1 IN	73.40
682-6222	600	LF	5.12	CONDUIT, NONMETL, TP 2, 2 IN	3072.00
935-1113	600	LF	1.83	OUTSIDE PLANT FIBER OPTIC CABLE, LOOSE TUBE, SINGLE MODE, 24 FIBER	1098.00
935-3201	1	EA	1114.50	FIBER OPTIC CLOSURE, AERIAL (SEALED), 6 FIBER	1114.50
935-4010	1	EA	41.93	FIBER OPTIC SPLICE, FUSION	41.93
935-6562	1	EA	1508.78	EXTERNAL TRANSCEIVER, DROP AND REPEAT, 1310 SINGLE MODE, (SIGNAL JOBS)	1508.78
936-8000	1	LS	1905.75	TESTING	1905.75
Section Sub Total:					\$99,812.25

Total Estimated Cost: \$143,912.67

Subtotal Construction Cost	\$143,912.67
E&C Rate 0.0 %	\$0.00
Inflation Rate 0.0 % @ 0.0 Years	\$0.00
Total Construction Cost	\$143,912.67
Right Of Way	\$102,050.00
ReImb. Utilities	\$9,100.00

Grand Total Project Cost \$255,062.67