

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA

OFFICE OF DESIGN POLICY & SUPPORT INTERDEPARTMENTAL CORRESPONDENCE

FILE P.I. #0005829 **OFFICE** Design Policy & Support
STP00-0005-00(829)
Bulloch County
GDOT District 5 - Jesup **DATE** 4/13/2016
SR 26 from CR 491/Amanda Road to
CR 423/Old Lee Field Road
Passing & Turn Lanes

FROM  for Brent Story, State Design Policy Engineer

TO SEE DISTRIBUTION

SUBJECT APPROVED LOCATION & DESIGN REPORT

Attached is the approved Location and Design Report with Notice of Location & Design Approval for the above subject project.

Attachment

DISTRIBUTION:

Hiral Patel, Director of Engineering
Joe Carpenter, Director of P3/Program Delivery
Genetha Rice-Singleton, Assistant Director of P3/Program Delivery
Albert Shelby, State Program Delivery Engineer
Darryl VanMeter, State Innovative Delivery Engineer
Bobby Hilliard, Program Control Administrator
Cindy VanDyke, State Transportation Planning Administrator
Eric Duff, State Environmental Administrator
Bill DuVall, State Bridge Engineer
Andrew Heath, State Traffic Engineer
Angela Robinson, Financial Management Administrator
Lisa Myers, State Project Review Engineer
Andy Casey, State Roadway Design Engineer
Troy Pittman for District Design Engineer
Richard Cobb, Location Bureau Chief
Brad Saxon, District Engineer
Troy Pittman, District Preconstruction Engineer
Troy Pittman/Maggie Yoder for District Planning & Programming Engineer
Ron Nelson, Area Engineer - D5, A4
David Moyer, Project Manager
BOARD MEMBER - 12th Congressional District

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**

INTERDEPARTMENT CORRESPONDENCE

FILE STP00-0005-00(829), Bulloch County **DATE** March 29, 2016
PI 0005829

FROM Albert V. Shelby III, State Program Delivery Engineer

AS Albert Shelby

TO Brent Story, State Design Policy Engineer

Attention: Dave Peters, State Conceptual Design Group Manager

SUBJECT Request for Location and Design Approval

Description and Project Proposal:

State Road 26 / U.S. 80 is a four lane facility with a flush median from Lester Road to Amanda Road. From Amanda Road/Stiles Street to Arcola Road, SR 26 / US 80 is a two lane undivided roadway with no or rural shoulders. The posted speed limit ranges from 35 mph to 55 mph along the corridor. From Veteran Memorial Parkway (SR 73 Bypass) to Amanda Road/Stiles Street, SR 26 /U.S. 80 is classified as an urban minor arterial street. From Amanda Road/Stiles Street to the Bryan County line, the roadway is functionally classified as a rural minor arterial. The truck percentage along this route is estimated to be between 8 and 11%. This roadway is not on the National Highway System (NHS). A passing lane is proposed to be built in the eastern direction beginning approximately 1100 feet east of Burkhalter Rd, and will end at Grimshaw Rd. In the western direction, a passing lane will be added just east of Old Leefield Rd, and will continue to approximately 1000 feet west of Bud Lee Lane/CR 350. Auxiliary lanes, both right and left will be added along the corridor as warranted by traffic data. This project is located in Georgia Militia District (GMD) 1523 in Bulloch County.

Concept Approval Date:

April 2, 2013.

Concept Update:

There are no concept changes at this time.

Environmental Document Type, Approval Date and any Re-evaluations:

A Categorical Exclusion (CE) - 3/9/16

Public Involvement: *Public Information Open House summary:*

- A PIOH was held on December 18, 2014 at the WW Mann Retreat center located at 2171 Prather Rd, Statesboro, GA 30461. The Citizens in attendance made significant comments that included increasing the scope of the project from a simple passing lane project to a full fledged 4-lane widening; unsupported concerns from those in the Cambridge Subdivision involving undesirable noise, inadequate drainage, possible destruction of plant and wildlife, excessive right of way acquisition and increased travel distance to enter and exit the Cambridge Subdivision; possible bottlenecking occurrences on either side of the project end points; and possibly adding right turn lanes at all residence locations.
- There were a total of 10 formal comments recorded.
- 4 of the 10 comments were in support of the project. 3 of the 10 comments were in opposition to the project. 3 of the 10 comments were uncommitted either way.
- There were a total of 20 in attendance at the PIOH. Notable officials/persons in attendance include Brooklet City Council Member Tom McElwee, State Representative Jan Tankersley, City of Statesboro Engineering/Public Works Jason Boyles, and WTOC TV Reporter Dal Cannady.
- There are no project changes currently under consideration from the comments made at the PIOH.

Consistency with Approved Planning:

The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations:

CONCUR: *Heidi Pettit*
Director of Engineering

APPROVE: *Mag B. Tankersley* *4/7/16*
Chief Engineer Date

DATE OF LOCATION AND DESIGN APPROVAL: *April 13, 2016*
(To be entered by the State Conceptual Design Group Manager)

Attachments: } Notice of Location and Design Approval
Sketch Map
Cost Estimate
KLP } Categorical Exclusion (CE) signature page


Prepared By:



Adam J. Archual
Environmental Planner
HNTB Corporation

2/19/2016
Date

Reviewed By:



Kay A. Abikoye
Transportation Environmental Planner
Georgia Department of Transportation
Office of Environmental Services

2/23/2016
Date


Concurred By:



Eric Duff
State Environmental Administrator
Georgia Department of Transportation

2/25/16
Date

Approved By:

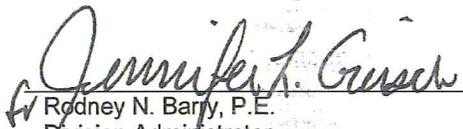


Rodney N. Barry, P.E.
Division Administrator
Federal Highway Administration

3-9-16
Date

Attachments appear in the following order:

1. Effects Evaluation
2. Correspondence/Report Coordination
3. Public Information Open House Materials

PROJECT LOCATION

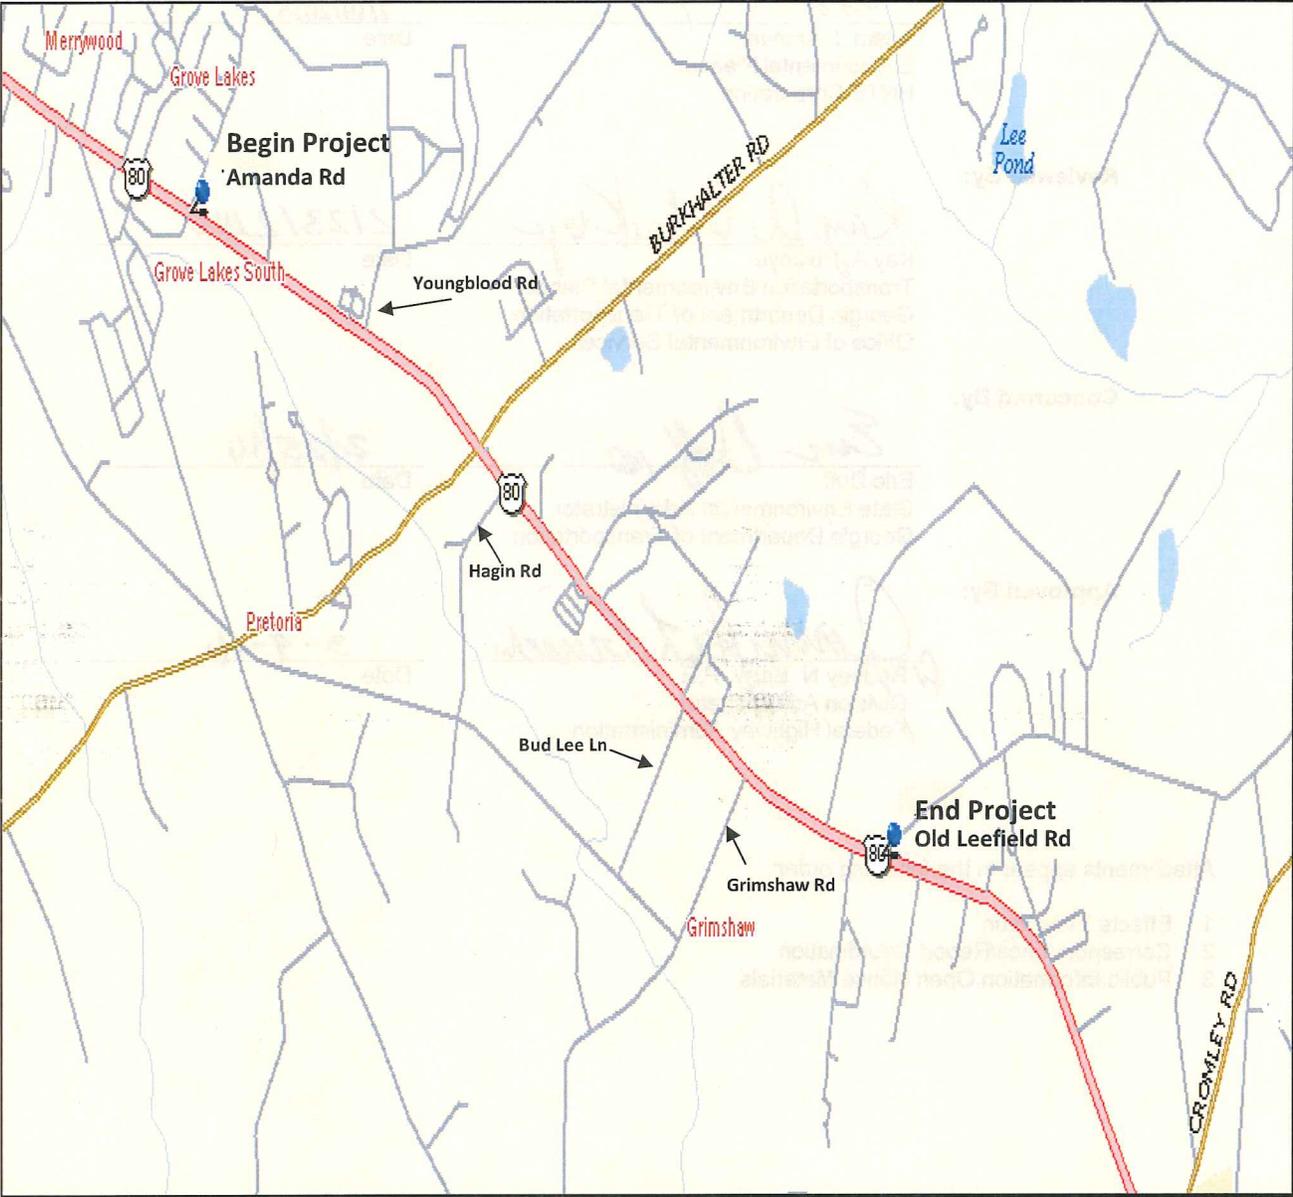

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**

INTERDEPARTMENT CORRESPONDENCE

FILE P.I. No. **OFFICE**

PROJECT DESCRIPTION

DATE

From:

To: Lisa L. Myers, State Project Review Engineer
via Email Mailbox: CostEstimatesandUpdates@dot.ga.gov

Subject: REVISIONS TO PROGRAMMED COSTS

PROJECT MANAGER

MGMT LET DATE

MGMT ROW DATE

PROGRAMMED COSTS (TPro W/OUT INFLATION)

LAST ESTIMATE UPDATE

CONSTRUCTION \$

DATE

RIGHT OF WAY \$

DATE

UTILITIES \$

DATE

REVISED COST ESTIMATES

CONSTRUCTION* \$

RIGHT OF WAY \$

UTILITIES \$

*Cost Contains % Contingency

REASONS FOR COST INCREASE AND CONTINGENCY JUSTIFICATION:

CONTINGENCY SUMMARY

A. CONSTRUCTION COST ESTIMATE:	\$	6,347,694.68	Base Estimate From CES
B. ENGINEERING AND INSPECTION (E & I):	\$	317,384.73	Base Estimate (A) x 5 %
C. CONTINGENCY:	\$	333,253.97	Base Estimate (A) + E & I (B) x 5 % See % Table in "Risk Based Cost Estimation" Memo
D. TOTAL LIQUID AC ADJUSTMENT:	\$	525,649.48	Total From Liquid AC Spreadsheet
E. CONSTRUCTION TOTAL:	\$	7,523,982.86	(A + B + C + D = E)

REIMBURSABLE UTILITY COSTS

UTILITY OWNER	REIMBURSABLE COST
Georgia Power Distribution	\$ 315,000.00
Bulloch Rural Telephone	
Frontier Communications	
Northland Cable	
Hargray Communications	
TOTAL	\$ 315,000.00

ATTACHMENTS: (File Copy in the Project Cost Estimate Folder)

Detailed Cost Estimate Printout From TRAQS
Liquid AC Adjustment Spreadsheet

PROJ. NO.
P.I. NO.
DATE

STP00-0005-00(829)
0005829
3/4/2016

CALL NO.

INDEX (TYPE)

REG. UNLEADED	DATE	INDEX
DIESEL	Mar-16	\$ 1.671
LIQUID AC		\$ 2.009
		\$ 355.00

Link to Fuel and AC Index:

<http://www.dot.ga.gov/doingbusiness/Materials/Pages/asphaltcementindex.aspx>

LIQUID AC ADJUSTMENTS

PA=[[APM-APL/APL]]XTMT*APL

Asphalt

Price Adjustment (PA)	Max. Cap	60%	\$	523064.1	\$	523,064.10
Monthly Asphalt Cement Price month placed (APM)			\$	568.00		
Monthly Asphalt Cement Price month project let (APL)			\$	355.00		
Total Monthly Tonnage of asphalt cement (TMT)				2455.7		

ASPHALT

	Tons	%AC	AC ton
Leveling	15825	5.0%	791.25
12.5 OGFC		5.0%	0
12.5 mm	11178	5.0%	558.9
9.5 mm SP		5.0%	0
25 mm SP	13754	5.0%	687.7
19 mm SP	8357	5.0%	417.85
	49114		2455.7

BITUMINOUS TACK COAT

Price Adjustment (PA)

Monthly Asphalt Cement Price month placed (APM)	Max. Cap	60%	\$	2,585.38	\$	2,585.38
Monthly Asphalt Cement Price month project let (APL)			\$	568.00		
Total Monthly Tonnage of asphalt cement (TMT)			\$	355.00		
				12.13795521		

Bitum Tack

Gals	gals/ton	tons
2826	232.8234	12.13795521

BITUMINOUS TACK COAT (surface treatment)

Price Adjustment (PA)

Monthly Asphalt Cement Price month placed (APM)	Max. Cap	60%	\$	0	\$	0
Monthly Asphalt Cement Price month project let (APL)			\$	568.00		
Total Monthly Tonnage of asphalt cement (TMT)			\$	355.00		
				0		

Bitum Tack

SY	Gals/SY	Gals	gals/ton	tons
Single Surf. Trmt.	0.20	0	232.8234	0
Double Surf. Trmt.	0.44	0	232.8234	0
Triple Surf. Trmt	0.71	0	232.8234	0

TOTAL LIQUID AC ADJUSTMENT

	\$	525,649.48
--	----	------------

DETAILED COST ESTIMATE



Job: 0005829

JOB NUMBER 0005829

FED/STATE PROJECT NUMBER STP00-0005-00(829)

SPEC YEAR: 01

DESCRIPTION: SR 26/US 80FM 5LN @ CR491 TO CR423/OLD LEE RD

ITEMS FOR JOB 0005829

Line Number	ITEM	QUANTITY	UNITS	PRICE	DESCRIPTION	AMOUNT
0005	310-5060	13365.000	SY	\$12.88000	GR AGGR BS CRS 6IN INCL MATL	\$172,141.20
0010	310-5080	57025.000	SY	\$19.02000	GR AGGR BS CRS 8IN INCL MATL	\$1,084,615.50
0015	402-1812	15825.000	TN	\$70.79117	RECYL AC LEVELING,INC BM&HL	\$1,120,270.27
0020	402-3121	13754.000	TN	\$71.54802	RECYL AC 25MM SP,GP1/2,BM&HL	\$984,071.47
0025	402-3130	11178.000	TN	\$76.82104	RECYL AC 12.5MM SP,GP2,BM&HL	\$858,705.59
0030	402-3190	8357.000	TN	\$75.95093	RECYL AC 19 MM SP,GP 1 OR 2 ,INC BM&HL	\$634,721.92
0035	413-1000	2826.000	GL	\$2.86410	BITUM TACK COAT	\$8,093.95
0040	500-3800	30.340	CY	\$1,086.23675	CL A CONC, INCL REINF STEEL	\$32,956.42
0045	550-1180	760.000	LF	\$52.98799	STM DR PIPE 18",H 1-10	\$40,270.87
0050	550-1240	424.000	LF	\$55.48671	STM DR PIPE 24",H 1-10	\$23,526.37
0055	550-1300	56.000	LF	\$71.53129	STM DR PIPE 30",H 1-10	\$4,005.75
0060	550-2180	2816.000	LF	\$28.32533	SIDE DR PIPE 18",H 1-10	\$79,764.13
0065	550-2240	56.000	LF	\$34.85000	SIDE DR PIPE 24",H 1-10	\$1,951.60
0070	550-3318	10.000	EA	\$686.57744	SAFETY END SECTION 18",STD,4:1	\$6,865.77
0075	550-3324	2.000	EA	\$775.24000	SAFETY END SECTION 24",STD,4:1	\$1,550.48
0080	550-3418	106.000	EA	\$483.64427	SAFETY END SECTION 18",SD,4:1	\$51,266.29
0100	550-3424	2.000	EA	\$565.09000	SAFETY END SECTION 24",SD,4:1	\$1,130.18
0085	653-2501	7.000	LM	\$1,803.47617	THERMO SOLID TRAF ST, 5 IN, WH	\$12,624.33
0090	653-2502	7.000	LM	\$1,823.59161	THERMO SOLID TRAF ST, 5 IN YE	\$12,765.14
0095	653-4502	1.000	GLM	\$938.82906	THERMO SKIP TRAF ST, 5 IN, YEL	\$938.83
0105	668-1100	2.000	EA	\$2,769.72416	CATCH BASIN, GP 1	\$5,539.45
0110	668-8011	313.000	SF	\$45.20711	SAFETY GRATE, TP 1	\$14,149.83
0115	668-8012	69.000	SF	\$38.00000	SAFETY GRATE, TP 2	\$2,622.00
SUBTOTAL FOR :						\$5,154,547.34

COST GROUP FOR JOB 0005829

LINE NUMBER	UNIT	CALCULATION RULE	QUANTITY	PRICE	COST GROUP ID	DESCRIPTION	AMOUNT
00000004	SY	PCTO	11931.473	\$6.12	EROC	EROSION CONTROL (PERCENT OF JOB)	\$73,020.62
00000005	LS	NORM	1.000	\$911,542.89	ERTHLS	EARTHWORK (LS)	\$911,542.89
00000006	LS	PCTO	11931.473	\$0.18	MISCPCTO	MISCELLANEOUS (PERCENT OF JOB)	\$2,147.67
00000007	LM	PCTO	11931.473	\$0.36	PVMKPCTO	PAVEMENT MARKING (PERCENT OF JOB)	\$4,295.33
00000008	EA	PCTO	11931.473	\$0.39	SIGNPCTO	SIGNS (PERCENT OF JOB)	\$4,653.27
00000011	LS	NORM	1.000	\$197,487.56	TRFT	TRAFFIC CONTROL-TEMPORARY (LS)	\$197,487.56
SUBTOTAL:							\$1,193,147.34

TOTALS FOR JOB 0005829

ITEMS COST:	\$5,154,547.34
COST GROUP COST:	\$1,193,147.34
ESTIMATED COST:	\$6,347,694.68
CONTINGENCY PERCENT:	0.05
ENGINEERING AND INSPECTION:	0.05
ESTIMATED COST WITH CONTINGENCY AND E&I:	\$6,982,464.15

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

FILE STP00-0005-00(829), PI No. 0005829, Bulloch County DATE: 9-22-2015
SR 26 from CR 491/Amanda Road to CR 423/Old Lee Field Road
FROM Dallory Rozier, District Utilities Engineer
TO David Moyer, Project Manager
SUBJECT UPDATED PRELIMINARY UTILITY COST (ESTIMATE)

As requested by your office, we are furnishing you with an updated Preliminary Utility Cost Estimate of each utility with facilities potentially located within the above project limits.

Facility Owner	Non-Reimbursable	Reimbursable	Comments
Georgia Power Distribution	\$204,750.00	\$315,000.00	
Bulloch Rural Telephone	\$106,785.00	\$0.00	
Frontier Communications	\$106,785.00	\$0.00	
Northland Cablevision	\$85,428.00	\$0.00	
Hargray Communications	\$255,000.00	\$0.00	
Totals	\$758,748.00	\$315,000.00	
Total Reimbursement		\$315,000.00	

CC: Lee Upkins, State Utilities Engineer
Kerry Gore, Assistant State Utilities Engineer
Jun Birnkammer, State Utilities Preconstruction Engineer
Yulanda Pride-Foster, Utilities Preconstruction Engineer
Merishia Robinson, Utilities Preconstruction Engineer
Vahid Munshi, Management Specialist
District Office File
Utilities Office File

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

FILE Project No. STP00-0005-00(829) OFFICE Right of Way
P.I. No. 0005829 County Bulloch
SR 26 from CR 491/Amanda Road to CR 423/Old Lee Field Road

DATE 10/5/2015

FROM  Troy D. Byers, Right of Way Administrator

TO David Moyer, Project Manager

SUBJECT Cost Estimates

Mgmt LET Date: 9/17/2017
Mgmt R/W Date: 11/20/2015

Attached is a current detailed cost estimate that we received that will be utilized for Right of Way authorization.

ROW Phase: 2016 \$1,264,800.00

Attached Cost Estimate \$2,320,000.00

Right of Way funding cannot be requested until the cost estimate has been approved by the Chief Engineer.

Timely submission of the cost estimate and timely approval notification is critical to maintaining the Right of Way authorization schedule. If you have any questions please call Floyd J. Williams at 404-347-0191.

GEORGIA DEPARTMENT OF TRANSPORTATION
 DETAILED ROW COST ESTIMATE SUMMARY

Date (MM/YYYY): October-15 Project: STP00-0005-00(829)
 Revised: County: Bulloch
 PI: 5829
 Description: SR 25/US 80 From CR 491/Amanda Road To CR 423/Old LeeField Road Bulloch
 Parcels: 71 R/W Plan Date: 8/6/2015

CONTRACT

Land and Improvements _____ \$682,772.24
 Valuation Services _____ \$273,750.00
 Legal Services _____ \$460,425.00
 Relocation _____ \$159,750.00
 Demolition _____ \$0.00

TOTAL CONTRACT _____ \$1,576,697.24

INHOUSE

TOTAL INHOUSE _____ \$735,000.00

TOTAL ESTIMATED COSTS _____ \$2,311,697.24

TOTAL ESTIMATED COSTS (ROUNDED) _____ \$2,320,000.00

Preparation Credits	Hours	Signature
Tony Griffis	40	<i>Tony Griffis</i>
Byron Cowart	40	<i>Byron Cowart</i>

Eric K. Murray CG#: 4545 (DATE) 10/2/15
 _____ CG#: (DATE)

Attachment(s): Project Location Map; Subject/Comp Location Map; Comparable Sales Data

STATE TRANSPORTATION IMPROVEMENT PROGRAM

Bulloch

Project: 0005829 Type Work: Passing Lanes

Descp: SR 26 FROM CR 491/AMANDA ROAD TO CR 423/OLD LEE FIELD ROAD
Length: 3.10

Total Project Cost: \$ 4,965,557
Total Project Authorizations: \$ 150,000
Total Parcels: 43

Phase	Fund	Year	Federal	State	Other	Total
PE	STP	2014	\$120,000	\$30,000	\$0	\$150,000
ROW	STP	2016	\$961,879	\$240,470	\$0	\$1,202,349
CST	STP	2018	\$2,625,587	\$656,397	\$0	\$3,281,984
UTL	STP	2018	\$264,979	\$66,245	\$0	\$331,224

Project Details: Improve passing opportunities- address operational and safety issues -constructing passing lanes and turn lanes along a 2 lane undivided section of US 80/SR 26 in Bulloch County.

Project: 0910364 Type Work: Intersection Improvement

Descp: S: 26 @ CR 585/BURKHALTER ROAD
Length: 0.47

Total Project Cost: \$ 1,306,257
Total Project Authorizations: \$ 510,000
Total Parcels: 6

Phase	Fund	Year	Federal	State	Other	Total
ROW	HSIP	2014	\$459,000	\$51,000	\$0	\$510,000
CST	HSIP	LUMP	\$716,631	\$79,626	\$0	\$796,257

Project Details: Will improve the capacity and operations of the intersection to enhance mobility- existing intersection is a two way - proposed project will convert into a roundabout on SR 26 in Bulloch County

Uses Lump Sum Bank: ROADWAY SAFETY FUNDS FOR FY 2015 - FY 2018

Project: 0010428 Type Work: Intersection Improvement

Descp: CR 248/LANGSTON CHAPEL ROAD @ CR 585/HARVILLE ROAD
Length: 0.20

Total Project Cost: \$ 850,000
Total Project Authorizations: \$ 0
Total Parcels: 0

Phase	Fund	Year	Federal	State	Other	Total
PE	Safety	LUMP	\$90,000	\$10,000	\$0	\$100,000
CST	Safety	LUMP	\$675,000	\$75,000	\$0	\$750,000

Project Details: Will improve the capacity and operations of the intersection to enhance mobility on CR 248 in Bulloch County

Uses Lump Sum Bank: HIGH RISK RURAL ROADS FOR FY 2015 - FY 2018

Project: 0011765 Type Work: RRX Warning Device

Descp: CS 699/ZETTEROWER AVE @ GSFR #620181T IN STATESBORO
Length: 0.40

Total Project Cost: \$ 265,000
Total Project Authorizations: \$ 0
Total Parcels: 0

Phase	Fund	Year	Federal	State	Other	Total
CST	HSIP	LUMP	\$265,000	\$0	\$0	\$265,000

Uses Lump Sum Bank: RRX PROTECTION DEVICE FOR FY 2015 - FY 2018

From: Westberry, Lisa
Sent: Friday, March 04, 2016 1:50 PM
To: Moyer, David <dmoyer@dot.ga.gov>
Cc: Tootle, Teresa <ttootle@dot.ga.gov>; Abikoye, Abolanle (Kay)
<AAbikoye@dot.ga.gov>; Adam Archual (aarchual@HNTB.com)
<aarchual@HNTB.com>
Subject: RE: 0005829 Mitigation cost estimate.

David,

It wasn't on my radar, but it didn't take long to get it done. The estimated cost for mitigation credits is \$24,000.

If you need anything else, please let me know.

Thanks, Lisa

Lisa Westberry | Special Projects Coordinator | Office of Environmental Services
| 600 West Peachtree Street, NW | Atlanta, GA 30308 | 404-631-1772

✉ Please consider the environment before you print this email.

From: Moyer, David
Sent: Thursday, March 03, 2016 11:42 AM
To: Westberry, Lisa
Cc: Tootle, Teresa; Abikoye, Abolanle (Kay); Adam Archual
(aarchual@HNTB.com)
Subject: 0005829 Mitigation cost estimate.

Lisa

Have you prepared a mitigation cost estimate for PI# 0005829 Bulloch county.
Can you send it to me or let me know if you need information to prepare it.

Thank You,

David G. Moyer, P.E.
Project Manager
Georgia Department of Transportation
Transportation
Office of Program Delivery
600 West Peachtree Street, 25th Floor
North
Atlanta, GA 30308
Mobile 404-291-5880
Fax 404-631-1588
E-mail dmoyer@dot.ga.gov

Direct Mailing Address:
Georgia Department of

Statesboro Area Office
17213 U.S. Hwy 301

Statesboro, GA 30458

NOTICE OF LOCATION AND DESIGN APPROVAL

STP00-0005-00(829)

Bulloch County

P.I. No. 0005829

Notice is hereby given in compliance with Georgia Code 22-2-109 and 32-3-5 that the Georgia Department of Transportation has approved the Location and Design of this project.

The date of location approval is April 13, 2016.

State Road 26 / U.S. 80 is a four lane facility with a flush median from Lester Road to Amanda Road. From Amanda Road/Stiles Street to Arcola Road, SR 26 / US 80 is a two lane undivided roadway with no or rural shoulders. The posted speed limit ranges from 35 mph to 55 mph along the corridor. From Veteran Memorial Parkway (SR 73 Bypass) to Amanda Road/Stiles Street, SR 26 /U.S. 80 is classified as an urban minor arterial street. From Amanda Road/Stiles Street to the Bryan County line, the roadway is functionally classified as a rural minor arterial. The truck percentage along this route is estimated to be between 8 and 11%. This roadway is not on the National Highway System (NHS). A passing lane is proposed to be built in the eastern direction beginning approximately 1100 feet east of Burkhalter Rd, and will end at Grimshaw Rd. In the western direction, a passing lane will be added just east of Old Leefield Rd, and will continue to approximately 1000 feet west of Bud Lee Lane/CR 350. Auxiliary lanes, both right and left will be added along the corridor as warranted by traffic data. This project is located in Georgia Militia District (GMD) 1523 in Bulloch County.

Drawings or maps or plats of the proposed project, as approved, are on file and are available for inspection at the Georgia Department of Transportation:

Ron Nelson, Area Engineer

ronelson@dot.ga.gov

17213 U.S. Hwy 301 North

Statesboro, GA 30458

(912) 871-1103

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

Albert V. Shelby III

Office of Program Delivery

ashelby@dot.ga.gov

Georgia Department of Transportation

600 West Peachtree Street

25th Floor

Atlanta, GA 30308

(404) 631-1758

Any written request or communication in reference to this project SHOULD include the Project and PI numbers as noted at the top of this notice.