


ORIGINAL TO GENERAL FILES

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA

OFFICE OF DESIGN POLICY & SUPPORT INTERDEPARTMENTAL CORRESPONDENCE

FILE P.I. #0007310 **OFFICE** Design Policy & Support
Multi-use Trail - SR 120 FM CR
78/WEBB BRIDGE WAY TO SR 141 -
PHASE II
GDOT District 7 - Metro Atlanta
Fulton County **DATE** May 30, 2012

FROM  for Brent Story, State Design Policy Engineer

TO SEE DISTRIBUTION

SUBJECT APPROVED LOCATION & DESIGN REPORT

Attached is the approved Location and Design Report with Notice of Location & Design Approval for the above subject project.

Attachment

DISTRIBUTION:

Genetha Rice-Singleton, Program Control Administrator
Lisa Myers, State Project Review Engineer
Phil Copeland, State Right-of-Way Administrator
Glenn Bowman, State Environmental Administrator
Bobby Hilliard, State Program Delivery Engineer
Kathy Zahul, State Traffic Engineer
Cindy VanDyke, State Transportation Planning Administrator
Ken Thompson, Location Bureau Chief
Ben Rabun, State Bridge Engineer
Angela Robinson, Financial Management Administrator
Sebastian Nesbitt, Area Engineer - D7, A2
Vicki Gavalas, District Planning & Programming Engineer
Scott Lee, District Preconstruction Engineer
Rachel Brown, District Engineer
Darrell DeJean, Project Manager
BOARD MEMBER - 6th Congressional District

proposed typical section will be (from the edge of the existing pavement): a 2.5' concrete curb and gutter, a 0-6' (varies) grassed strip, a 5.0' concrete sidewalk, and a 2.5'-6' (varies) grass strip behind the sidewalk. Grass strip varies to avoid power poles and historic properties.

Concept Approval Date: 02/21/2012

Concept Update: N/A

Environmental Document Type, Approval Date & any Reevaluations: PCE Approved 02/06/2012


Public Involvement: None

Consistency with Approved Planning:

The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: Recommend that the location and design for the project be approved and that the attached Notice be approved for advertising.

RECOMMEND: 
Director of Engineering

APPROVE:  5/2012
Chief Engineer Date

DATE OF LOCATION AND DESIGN APPROVAL: May 30, 2012
(To be entered by the State Conceptual Design Group Manager)

Attachments:


- Sketch Map
- Cost Estimate
- Notice of Location and Design Approval

SITE LOCATION MAP

P. I. Number: 0007310

Project Number: CSHPP00-0007-00(310)

County: Fulton

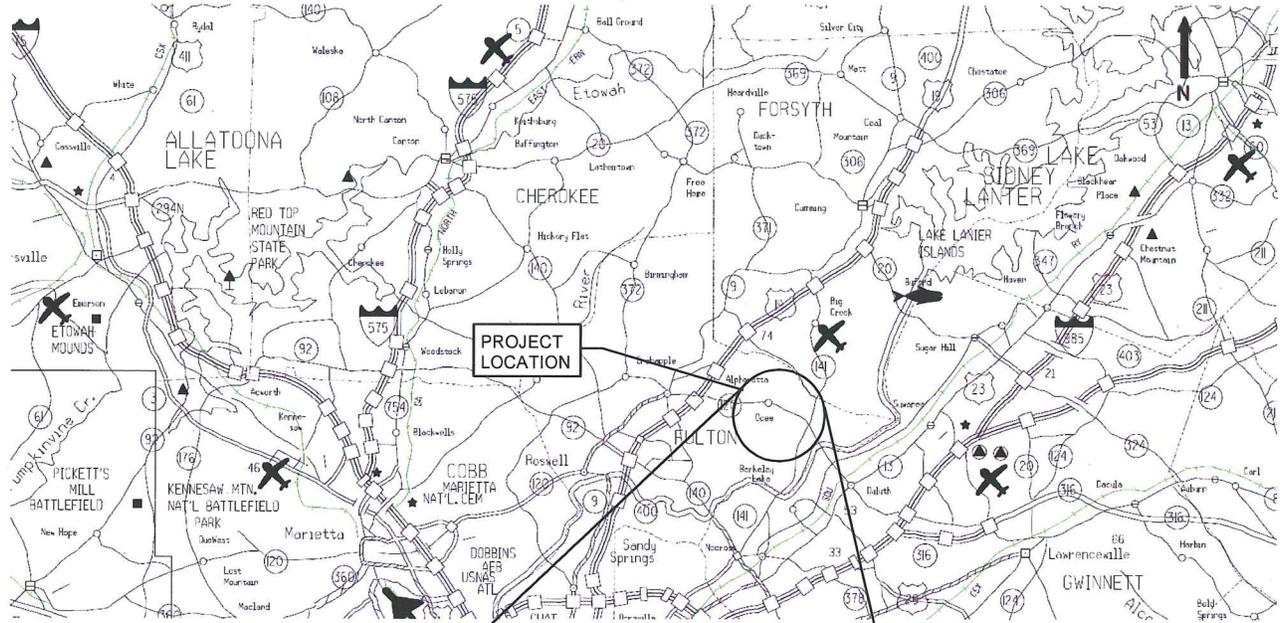

BEGIN PROJECT
(MILEPOST 12.83)

END PROJECT
(MILEPOST 15.71)

Abbotts Bridge Road Pedestrian Connectivity
Trail and Sidewalk Improvements along
SR 120 (from Webb Bridge Road to Medlock Bridge Road)
City of Johns Creek

STATE HIGHWAY AGENCY

DATE : 04/30/2012

JOB ESTIMATE REPORT

JOB NUMBER : 0007310

SPEC YEAR: 01

DESCRIPTION: ABBOTTS BRIDGE PEDESTRIAN CONNECTIVITY

ITEMS FOR JOB 0007310							
LINE	ITEM	ALT	UNITS	DESCRIPTION	QUANTITY	PRICE	AMOUNT
0005	150-1000		LS	TRAFFIC CONTROL - 0007310	1	30000.00	30000.00
0010	207-0203		CY	FOUND BK FILL MATL, TP II	290	43.83	12713.51
0015	210-0100		LS	GRADING COMPLETE - 0007310	1	150000.00	150000.00
0020	310-1101		TN	GR AGGR BASE CRS, INCL MATL	116	25.34	2940.4
0025	318-3000		TN	AGGR SURF CRS	120	18.72	2247.24
0030	402-3130		TN	RECYL AC 12.5MM SP,GP2,BM&HL	28	89.79	2514.19
0035	441-0104		SY	CONC SIDEWALK, 4 IN	5648	29.03	163982.96
0040	441-0106		SY	CONC SIDEWALK, 6 IN	248	43.05	10678.24
0045	441-0303		EA	CONC SPILLWAY, TP 3	1	2041.13	2041.14
0050	441-0304		EA	CONC SPILLWAY, TP 4	1	1868.30	1868.30
0055	441-0600		CY	CONC HEADWALLS	3	999.52	2998.57
0060	441-6022		LF	CONC CURB & GUTTER, 6"X30"TP2	5514	14.09	77699.59
0065	444-1000		LF	SAWED JTS IN EXIST PVMTS - PCC	5514	2.49	13736.7
0070	500-3200		CY	CL B CONC	1	401.02	401.03
0075	500-3201		CY	CL B CONC, RET WALL	65	492.58	32018.19
0080	515-2020		LF	GALV STEEL PIPE HDRAIL, 2", ROUD	466	43.05	20062.77
0085	550-1180		LF	STM DR PIPE 18", H 1-10	1654	35.12	58099.16
0090	550-4418		EA	FLARED END SECT 18 IN, SLP DR	2	408.92	817.86
0095	550-4424		EA	FLARED END SECT 24 IN, SLP DR	2	434.06	868.12
0100	610-1055		LF	REM GUARDRAIL	200	3.93	787.89
0105	610-1075		EA	REM GUARDRAIL ANCH, ALL TYPES	2	177.91	355.83
0110	641-1100		LF	GUARDRAIL, TP T	322	44.20	14233.06
0115	641-1200		LF	GUARDRAIL, TP W	1390	16.93	23539.57
0120	641-5001		EA	GUARDRAIL ANCHORAGE, TP 1	8	645.61	5164.89
0125	641-5012		EA	GUARDRAIL ANCHORAGE, TP 12	8	1811.40	14491.28
0130	643-8200		LF	BARRIER FENCE (ORANGE), 4 FT	967	2.06	1993.77
0135	653-1704		LF	THERM SOLID TRAF STRIPE, 24", WH	76	3.90	296.79
0140	653-1804		LF	THERM SOLID TRAF STRIPE, 8", WH	1473	1.97	2903.86
0145	550-1240		LF	STM DR PIPE 24", H 1-10	131	45.93	6017.92
0150	668-1100		EA	CATCH BASIN, GP 1	14	2320.32	32484.50
0155	668-1200		EA	CATCH BASIN, GP 2	2	3084.55	6169.11
0160	668-4300		EA	STORM SEW MANHOLE, TP 1	1	2295.34	2295.35
0165	163-0232		AC	TEMPORARY GRASSING	2	269.98	539.96
0170	163-0300		EA	CONSTRUCTION EXIT	5	1317.22	6586.11
0175	163-0528		LF	CONSTR AND REM FAB CK DAM - TP C SLT FN	432	3.53	1528.77
0180	163-0529		LF	CNST/REM TEMP SED BAR OR BLD STRW CK DM	1117	3.32	3712.03
0185	163-0542		EA	CONSTR & REM STONE FILTER RING	2	771.00	1542.02
0190	163-0550		EA	CONS & REM INLET SEDIMENT TRAP	16	131.14	2098.39
0195	165-0030		LF	MAINT OF TEMP SILT FENCE, TP C	3214	0.88	2834.49
0200	165-0041		LF	MAINT OF CHECK DAMS - ALL TYPES	775	1.14	887.88
0205	165-0071		LF	MAINT OF SEDIMENT BARRIER - BALED STRAW	1500	0.89	1337.13
0210	165-0101		EA	MAINT OF CONST EXIT	5	575.22	2876.12
0215	167-1000		EA	WATER QUALITY MONITORING AND SAMPLING	2	478.38	956.77
0220	167-1500		MO	WATER QUALITY INSPECTIONS	12	543.82	6525.88
0225	171-0030		LF	TEMPORARY SILT FENCE, TYPE C	6428	2.78	17903.39
0230	603-2018		SY	STN DUMPED RIP RAP, TP 1, 18"	28	47.95	1342.72
0235	603-7000		SY	PLASTIC FILTER FABRIC	26	4.45	115.92
0240	700-6910		AC	PERMANENT GRASSING	3	685.85	2057.57
0245	700-7000		TN	AGRICULTURAL LIME	6	89.09	534.60
0250	700-8000		TN	FERTILIZER MIXED GRADE	1	428.87	428.87
0255	700-8100		LB	FERTILIZER NITROGEN CONTENT	1200	1.67	2004.42
0260	710-9000		SY	PERM SOIL REINFORCING MAT	2400	3.74	8998.34
0265	716-2000		SY	EROSION CONTROL MATS, SLOPES	3585	0.94	3397.04

JOB ESTIMATE REPORT

ITEM TOTAL 764630.21
 INFLATED ITEM TOTAL 764630.21

TOTALS FOR JOB 0007310

ESTIMATED COST: 764630.21
 CONTINGENCY PERCENT (0.0): 0.00
 ESTIMATED TOTAL: 764630.21

ENGINEERING & INSPECTION (5%) 38231.51

FUEL & ASPH ADJUSTMENT 0.00

CONSTRUCTION COST ESTIMATE 802861.72

NOTICE OF LOCATION AND DESIGN APPROVAL

Project Number CSHPP-0007-00(310), Fulton County

P.I. Number 0007310

Notice is hereby given in compliance with Georgia code 22-2-109-(b) and 32-3-5 that the Georgia Department of Transportation has approved the Location and Design of this project.

Date of Location Approval: May 30, 2012

The project is located in the City of Johns Creek. Land lots 163, 193, 198, 229, 230, 237, 238, 266, 267, 277, 278, 309, of the 1st District and 1st Section of Fulton County.

The project consists of installing a 10 foot multi-use trail from Webb Bridge Road to Jones Bridge Road on the north side of SR 120. On the south side of SR 120, the project consists of installing a 5 foot sidewalk from Jones Bridge Road to Medlock Bridge Road to complete gaps where no sidewalk exists.

Drawings and/or maps, and/or plats of the proposed project as approved are on file and are available for inspection at the Georgia Department of Transportation:

Sebastian Nesbitt
Area 2 Engineer
snesbitt@dot.ga.gov
1269 Kennestone Circle
Marietta, GA 30066
770-528-3238

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

Bobby Hilliard
State Program Delivery Engineer
bhilliard@dot.ga.gov
600 West Peachtree Street
Atlanta, GA 30308
404-631-1122

Any written request or communication in reference to this project or notice SHOULD include the Project and P.I. Numbers as noted at the top of this notice.