

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**

INTERDEPARTMENTAL CORRESPONDENCE

FILE CSTEE-0009-00(117), Muscogee County **OFFICE** Program Delivery
 PI No. 0009117
 Wynnton Road Master Plan – Phase 1
DATE June 25, 2013

FROM Genetha Rice-Singleton, State Program Delivery Engineer *Albert Shelby for*

TO Brent A. Story, P.E., State Design Policy & Support Engineer
 Attention: Dave Peters, P.E., State Conceptual Design Group Manager

SUBJECT **Request for Location and Design Approval**

Description and Project Proposal: This transportation enhancement project, CSTEE-0009-00(117) PI No. 0009117, is a streetscape improvement project located in Muscogee County along SR 22/Wynnton Road in Midtown Columbus. The gross project length is approximately 2300 feet (0.436 miles). The project limits for the streetscape improvement project extend from the west to the east between Brown and Peacock Avenues to Hilton Avenue, within this section there are seven (7) intersections, with five (5) signalized intersection at Hilton Avenue, Lawyer's Lane, Ada Avenue and Stark Avenue, Henry Avenue and Forest Avenue as well as Brown Avenue and Peacock Avenue with two (2) additional unsignalized intersections at Wildwood Avenue and Cedar Avenue. The project is located in the 8th Land District of Muscogee County and the 921st Georgia Military District.

Concept Approval Date: February 10, 2010

Concept Update: No changes have been made since the approval of the Concept dated February 10, 2010

Environmental Document Type, Approval Date: Categorical Exclusion approved September 8, 2010

Public Involvement:

- Public information meetings were held by the local sponsor on November 19, 2009 and October 27, 2010. No formal comments were recorded. Major response to the project was favorable.

Consistency with Approved Planning: The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: Recommend that the location and design for the project be approved and that the attached Notice be approved for advertising.

RECOMMEND:

[Signature] 6/28/13
Director of Engineering

APPROVED:

[Signature]
Chief Engineer

7/5/13
Date

Date of LTD Approval: July 11, 2013 *[initials]*

Attachments: Sketch Map, Cost Estimate, and Notice of Location and Design Approval

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**


Project Number: CSTE0009-00(117)

County: Muscogee

P.I. Number: 0009117

State Route Number: S.R. 22 Spur

Project Area Map

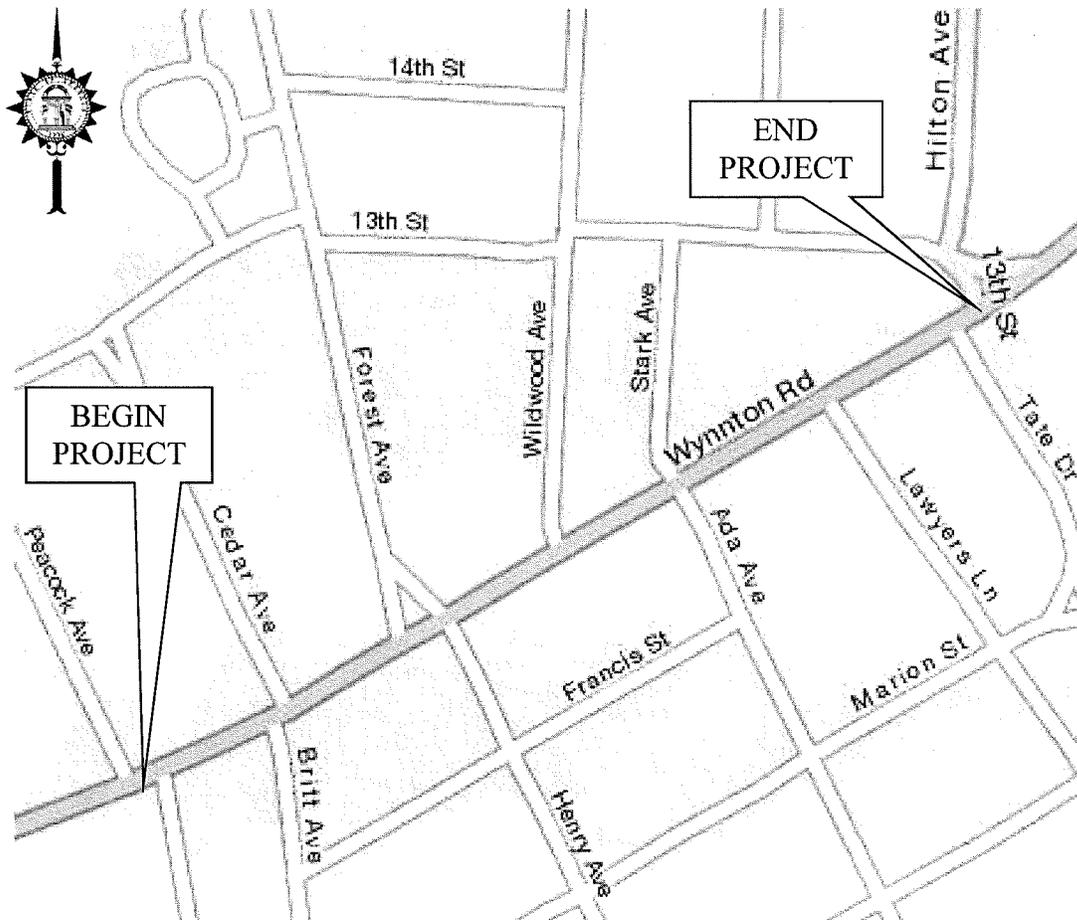

Estimate Report for file "Wynnton"

Section Erosion Control					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
163-0232	1	AC	470.24	TEMPORARY GRASSING	470.24
165-0030	4730	LF	0.66	MAINTENANCE OF TEMPORARY SILT FENCE, TP C	3121.8
165-0105	25	EA	122.2	MAINTENANCE OF INLET SEDIMENT TRAP	3055.0
171-0030	4730	LF	2.95	TEMPORARY SILT FENCE, TYPE C	13953.5
Section Sub Total:					\$20,600.54

Section Roadway					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
150-1000	1	LS	30000.0	TRAFFIC CONTROL -	30000.0
210-0100	1	LS	50000.0	GRADING COMPLETE -	50000.0
310-5060	1400	SY	9.54	GR AGGR BASE CRS, 6 INCH, INCL MATL	13355.99
441-0104	4100	SY	33.14	CONC SIDEWALK, 4 IN	135874.0
441-5002	5000	LF	11.14	CONCRETE HEADER CURB, 6 IN, TP 2	55700.0
550-1150	366	LF	32.5	STORM DRAIN PIPE, 15 IN, H 1-10	11895.0
550-1180	169	LF	45.35	STORM DRAIN PIPE, 18 IN, H 1-10	7664.15
610-0355	5000	LF	10.83	REM CONC CURB & GUTTER ALL SIZES	54150.0
610-2700	6000	SY	10.0	REM CONCRETE	60000.0
610-9001	21	EA	436.81	REM SIGN	9173.01
611-8120	33	EA	341.58	ADJUST WATER METER BOX TO GRADE	11272.14
611-8140	3	EA	732.82	ADJUST WATER VALVE BOX TO GRADE	2198.46
668-2100	6	EA	2413.87	DROP INLET, GP 1	14483.22
668-2105	5	EA	2162.0	DROP INLET, GP 1, SPCL DES.	10810.0
668-4300	3	EA	2263.3	STORM SEWER MANHOLE, TP 1	6789.90
900-0037	10000	SF	8.91	CONCRETE PAVERS	89100.0
Section Sub Total:					\$562,465.88

Section Landscaping					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
681-4120	50	EA	2995.0	LIGHTING STD, 12 FT MH, POST TOP	149750.0
700-9300	1000	SY	4.04	SOD	4040.0
702-0542	60	EA	350.0	LAGERSTROEMIA INDICA -	21000.0
702-0977	55	EA	200.0	RHAPHIOLEPIS INDICA -	11000.0
754-4000	14	EA	213.17	WASTE RECEPTACLE UNIT	2984.37
754-5000	12	EA	1225.58	BENCH	14706.96
Section Sub Total:					\$203,481.34

Section Signing And Marking					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
636-1041	113	SF	37.51	HIGHWAY SIGNS, TP 2 MATL, REFL SHEETING, TP 9	4238.63
636-1072	122	SF	30.93	HIGHWAY SIGNS, ALUM EXTRUDED PANELS, REFL SHEETING, TP 3	3773.46
636-2070	360	LF	8.76	GALV STEEL POSTS, TP 7	3153.6
652-0095	4	EA	42.0	PAVEMENT MARKING, HANDICAP SYMBOL	168.0
Section Sub Total:					\$11,333.69

Total Estimated Cost: \$797,881.45

Estimate Report for file "Wynnton Road Non T.E. Improvements"

Section Roadway					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
402-3131	1200	TN	66.87	RECYCLED ASPH CONC 9.5 MM SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME	80244.0
413-1000	50	GL	1.89	BITUM TACK COAT	94.5
432-0206	10733	SY	1.6	MILL ASPH CONC PVMT, 1 1/2 IN DEPTH	17172.8
Section Sub Total:					\$97,511.30

Section Signing And Marking					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
653-1704	100	LF	4.09	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	409.0
653-1804	1500	LF	2.13	THERMOPLASTIC SOLID TRAF STRIPE, 8 IN, WHITE	3195.0
Section Sub Total:					\$3,604.00

Section Traffic Signal					
Item Number	Quantity	Units	Unit Price	Item Description	Cost
647-1000	1	LS	80000.0	TRAFFIC SIGNAL INSTALLATION NO - 01	80000.0
647-1000	1	LS	80000.0	TRAFFIC SIGNAL INSTALLATION NO - 02	80000.0
647-1000	1	LS	80000.0	TRAFFIC SIGNAL INSTALLATION NO - 03	80000.0
647-1000	1	LS	80000.0	TRAFFIC SIGNAL INSTALLATION NO - 04	80000.0
Section Sub Total:					\$320,000.00

Total Estimated Cost: \$421,115.30

NOTE: The City of Columbus will pay for roadway and other non-pedestrian improvement items through an additional funding source.

NOTICE OF LOCATION AND DESIGN APPROVAL

**PROJECT: CSTE-0009-00(117) Muscogee County
P.I. No. 0009117**

Notice is hereby given in compliance with Georgia Code 22-2-109 and 32-3-5 that the Georgia Department of Transportation has approved the Location and Design of the above project.

Date of Location and Design Approval: **July 11, 2013**

This project, CSTE-0009-00(117) PI No. 0009117, is a streetscape improvement project located in Muscogee County along SR 22/Wynnton Road in Midtown Columbus. The gross project length is approximately 2300 feet (0.436 miles). The project limits for the streetscape improvement project extend from the west to the east between Brown and Peacock Avenues to Hilton Avenue, within this section there are seven (7) intersections, with five (5) signalized intersection at Hilton Avenue, Lawyer's Lane, Ada Avenue and Stark Avenue, Henry Avenue and Forest Avenue as well as Brown Avenue and Peacock Avenue with two (2) additional unsignalized intersections at Wildwood Avenue and Cedar Avenue. The project is located in the 8th Land District of Muscogee County and the 921st Georgia Military District.

Drawings or maps or plats of the proposed project ,as approved, are on file and are available for public inspection at the Georgia Department of Transportation,

Columbus Area Office
J. D. Abercrombie, Acting Area Engineer
jabercrombie@dot.ga.gov
3600 Schatulga Road
Columbus, Georgia 31907
(706) 568-2165

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

Genetha Rice-Singleton, State Program Delivery Engineer
Office of Program Delivery
grice-singleton@dot.ga.gov
One Georgia Center
600 West Peachtree Street
Atlanta, Georgia 30308
(404) 631-1522

Any written request or communication in reference to this project SHOULD include the Project and P.I. Numbers as noted at the top of this notice.