

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**

**OFFICE OF DESIGN POLICY & SUPPORT
INTERDEPARTMENTAL CORRESPONDENCE**

FILE P.I. #0010350

OFFICE Design Policy & Support

Fulton County
GDOT District 7 - Metro Atlanta
SR 8/SR 10 from CS 1860/Piedmont Ave.
to SR 42

DATE April 30, 2014

FROM  for Brent Story, State Design Policy Engineer

TO SEE DISTRIBUTION

SUBJECT APPROVED LOCATION & DESIGN REPORT

Attached is the approved Location and Design Report with Notice of Location & Design Approval for the above subject project.


Attachment

DISTRIBUTION:

Glenn Bowman, Director of Engineering
Joe Carpenter, Director of P3/Program Delivery
Genetha Rice-Singleton, Assistant Director of P3/Program Delivery
Albert Shelby, State Program Delivery Engineer
Bobby Hilliard, Program Control Administrator
Cindy VanDyke, State Transportation Planning Administrator
Hiral Patel, State Environmental Administrator
Ben Rabun, State Bridge Engineer
Kathy Zahul, State Traffic Engineer
Angela Robinson, Financial Management Administrator
Lisa Myers, State Project Review Engineer
Jeff Fletcher, Location Bureau Chief
Rachel Brown, District Engineer
Scott Lee, District Preconstruction Engineer
Kevin Cowan, District Planning & Programming Engineer
Persephone Goodwin, Area Engineer - D7, A4
Carleton Fisher, Project Manager
BOARD MEMBER - 5th Congressional District

PROJECT LOCATION

PI Number	0010350
County	Fulton
Description	SR 8 (Ponce de Leon Avenue)

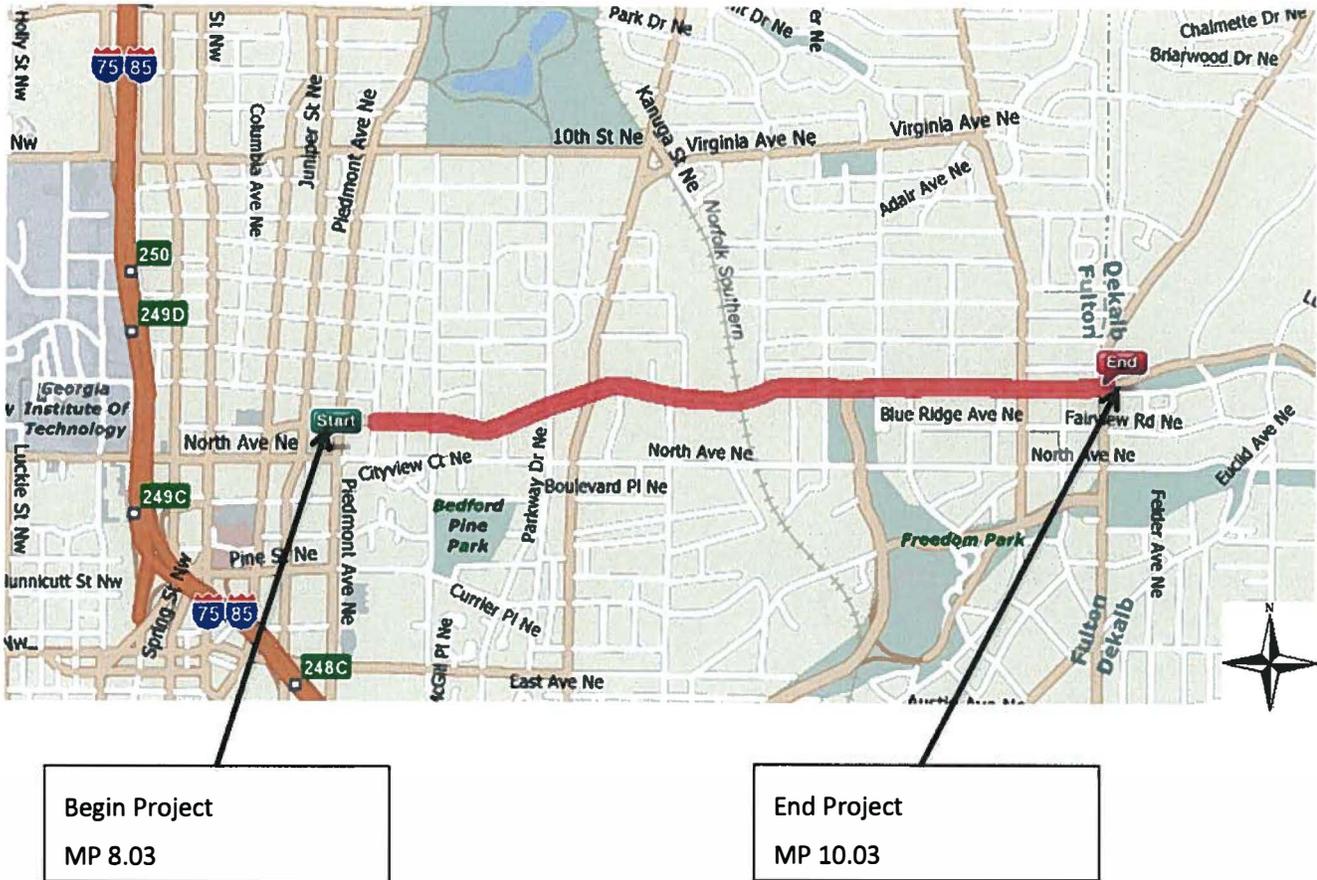

JOB ESTIMATE REPORT

JOB NUMBER : 0010350-2
 DESCRIPTION: PONCE DE LEON

SPEC YEAR: 01

ITEMS FOR JOB 0010350-2

LINE	ITEM	ALT	UNITS	DESCRIPTION	QUANTITY	PRICE	AMOUNT
0005	150-1000		LS	TRAFFIC CONTROL - 0010350	1.000	10000.00	10000.00
0010	202-1000		AC	CLEARING AND GRUBBING	1.000	10000.00	10000.00
0015	210-0100		LS	GRADING COMPLETE - 0010350	1.000	15000.00	15000.00
0020	210-0250		CY	UNDERCUT EXCAVATION	750.000	4.00	3000.00
0025	310-1101		TN	GR AGGR BASE CRS, INCL MATL	65.000	28.72	1867.04
0030	437-1300		LF	ST GRANITE CURB,5" X 16",TP A	220.000	30.00	6600.00
0035	437-2600		LF	CI GRANITE CURB,5" X 16",TP A	250.000	40.00	10000.00
0040	441-0104		SY	CONC SIDEWALK, 4 IN	920.000	34.00	31280.00
0045	441-0748		SY	CONC MEDIAN, 6 IN	100.000	41.35	4135.66
0050	441-0764		SY	CONC MEDIAN, 10 IN	290.000	70.00	20300.00
0055	441-6012		LF	CONC CURB & GUTTER/ 6"X24"TP2	22.000	13.14	289.25
0060	441-6022		LF	CONC CURB & GUTTER, 6"X30"TP2	54.000	35.82	1934.30
0065	500-9999		CY	CL B CONC,BASE OR PVMT WIDEN	5.000	160.42	802.10
0070	550-1180		LF	STM DR PIPE 18",H 1-10	8.000	52.72	421.80
0075	573-2006		LF	UNDDR PIPE INCL DRAIN AGGR 6"	100.000	16.39	1639.51
0080	611-3030		EA	REC STORM SEW MANHOLE, TYPE 1	1.000	1424.77	1424.77
0085	611-3100		EA	RECONSTR JCT BOX	1.000	1500.00	1500.00
0090	611-5551		EA	RESET SIGN	5.000	426.04	2130.22
0095	611-8050		EA	ADJUST MANHOLE TO GRADE	2.000	748.85	1497.71
0100	611-8055		EA	ADJUST MINOR STRUCT TO GRADE - ADJUST GAS METER TO GRADE	1.000	500.00	500.00
0105	611-8120		EA	ADJUST WATER METER BX TO GRADE	5.000	255.48	1277.40
0110	634-1200		EA	RIGHT OF WAY MARKERS	18.000	117.21	2109.87
0115	636-1020		SF	HWY SGN,TP1MAT,REFL SH TP3	80.000	14.08	1127.15
0120	636-2070		LF	GALV STEEL POSTS, TP 7	130.000	7.52	978.11
0125	647-1000		LS	TRAF SIGNAL INSTALLATION NO - HAWK SIGNALS	1.000	90000.00	90000.00
0130	653-1501		LF	THERMO SOLID TRAF ST 5 IN, WHI	475.000	0.75	359.66
0135	653-1502		LF	THERMO SOLID TRAF ST, 5 IN YEL	160.000	0.89	143.75
0140	653-1704		LF	THERM SOLID TRAF STRIPE,24",WH	190.000	6.26	1189.59
0145	653-1804		LF	THERM SOLID TRAF STRIPE, 8",WH	870.000	2.24	1954.77
0150	653-3501		GLF	THERMO SKIP TRAF ST, 5 IN, WHI	40.000	0.47	18.85
0155	653-6006		SY	THERM TRAF STRIPING, YELLOW	130.000	3.52	458.67
0160	665-0070		EA	RAISE / LOWER GAS VALVE	2.000	500.00	1000.00
0165	668-2100		EA	DROP INLET, GP 1	1.000	1906.32	1906.32
0170	615-1200		LF	DIRECTIONAL BORE - 5 IN	150.000	40.00	6000.00
0175	639-3014		EA	STEEL STR POLE,TP 4,LUMIN ARM	2.000	10190.04	20380.09
0180	682-6233		LF	CONDUIT, NONMETL, TP 3, 2 IN	300.000	8.00	2400.00
0185	615-1200		LF	DIRECTIONAL BORE - 2 IN	3000.000	20.00	60000.00
0190	681-4120		EA	LT STD, 12' MH, POST TOP	137.000	3000.00	411000.00
0195	681-4270		EA	LTG STD, 25' MH,4 FT ARM	33.000	5000.00	165000.00
0200	681-6346		EA	LUMINAIRE,TP 3, 250W,HP SODIUM	33.000	1400.00	46200.00
0205	681-6520		EA	LUMINAIRE,TP 5, 150W,HP SODIUM	137.000	1200.00	164400.00
0210	682-1404		LF	CABLE, TP XHHW, AWG NO 10	16500.000	2.50	41250.00

STATE HIGHWAY AGENCY

DATE : 09/24/2013

PAGE : 2

JOB ESTIMATE REPORT

0215	682-1406	LF	CABLE, TP XHHW, AWG NO 6	19000.000	2.25	42750.00
0220	682-1407	LF	CABLE, TP XHHW, AWG NO 4	14555.000	2.00	29110.00
0225	682-1408	LF	CABLE, TP XHHW, AWG NO 2	26000.000	2.00	52000.00
0230	682-1413	LF	CABLE, TP XHHW, AWG NO 1/0	100.000	3.00	300.00
0235	682-6225	LF	CONDUIT, NONMETL, TP 2, 2 1/2 IN	500.000	9.00	4500.00
0240	682-6233	LF	CONDUIT, NONMETL, TP 3, 2 IN	13400.000	4.50	60300.00
0245	682-9000	LS	MAIN SVC PICK UP POINT 1	1.000	10000.00	10000.00
0250	682-9000	LS	MAIN SVC PICK UP POINT 2	1.000	10000.00	10000.00
0255	682-9000	LS	MAIN SVC PICK UP POINT 3	1.000	10000.00	10000.00
0260	682-9000	LS	MAIN SVC PICK UP POINT 4	1.000	10000.00	10000.00
0265	682-9000	LS	MAIN SVC PICK UP POINT 5	1.000	10000.00	10000.00
0270	682-9000	LS	MAIN SVC PICK UP POINT 6	1.000	10000.00	10000.00
0275	682-9000	LS	MAIN SVC PICK UP POINT 7	1.000	10000.00	10000.00
0280	682-9000	LS	MAIN SVC PICK UP POINT 8	1.000	10000.00	10000.00
0285	682-9000	LS	MAIN SVC PICK UP POINT 9	1.000	10000.00	10000.00
0290	682-9000	LS	MAIN SVC PICK UP POINT 10	1.000	10000.00	10000.00
0295	682-9022	EA	ELEC JCT BX, REF PLASTIC MORTAR	45.000	500.00	22500.00
ITEM TOTAL						1454936.57
INFLATED ITEM TOTAL						1454936.57
TOTALS FOR JOB 0010350-2						
ESTIMATED COST:						1454936.59
CONTINGENCY PERCENT (0.0):						0.00
ESTIMATED TOTAL:						1454936.59

NOTICE OF LOCATION AND DESIGN APPROVAL

0010350, FULTON COUNTY

P. I. 0010350

Notice is hereby given in compliance with Georgia Code 22-2-109 and 32-3-5 that the Georgia Department of Transportation has approved the Location and Design of this project.

The date of location and design approval is: April 30, 2014

The project consists of a two mile section of SR 8/SR 10/Ponce de Leon Avenue, beginning at the intersection with CS 1860/Piedmont Avenue and ending at the intersection with SR 42/Moreland Avenue. The project is located entirely within Land Lots 16, 17, 48, & 49 of Land District 14 and Land Lot 241 of Land District 15 in Fulton County.

The project includes pedestrian safety improvements along the corridor to include upgrading the pedestrian signal heads, sidewalk installation/repair, intermittent traffic islands, and "HAWK" pedestrian crossing signals at selected locations. The project also recommends pedestrian lighting along the corridor to provide optimum sidewalk lighting to help address pedestrian crossing accidents.

Drawings or maps or plats of the proposed project, as approved, are on file and are available for public inspection at the Georgia Department of Transportation:

Persephone Goodwin
District Seven, Area Four Engineer
pgoodwin@dot.ga.gov
276 Memorial Drive, SW
Atlanta, GA 30303
(404) 853-0401

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

Albert Shelby
Office of Program Delivery
Attn: Carleton Fisher
ashelby@dot.ga.gov
600 West Peachtree Street, NW 25th floor
Atlanta, Georgia 30308

Any written request or communication in reference to this project or notice SHOULD include the Project and P. I. Numbers as noted at the top of this notice.