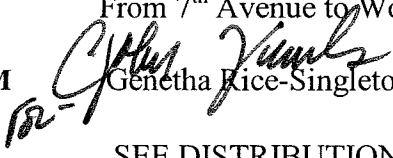


ORIGINAL TO GENERAL FILES

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**

INTERDEPARTMENT CORRESPONDENCE

FILE P. I. No. 350730-, Muscogee County **OFFICE** Preconstruction
STP00-8016-00(003)
SR 982/Talbotton Road/Warm Springs Road **DATE** June 27, 2008
From 7th Avenue to Woodruff/Hilton
FROM  Genetha Rice-Singleton, Assistant Director of Preconstruction
TO SEE DISTRIBUTION

SUBJECT APPROVED NOTICE OF LOCATION AND DESIGN

Attached is the approved Location and Design Report for the above subject project.


Also attached is the Notice of Location and Design Approval. This is the Authorization for the District to proceed with advertisement

Attachment

DISTRIBUTION:

Brian Summers
Harvey Keepler
Ken Thompson
Michael Henry
Keith Golden
Angela Alexander
Paul Liles
Ben Buchan
Thomas Howell
BOARD MEMBER

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA**
INTERDEPARTMENTAL CORRESPONDENCE

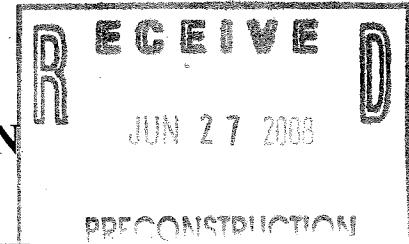

FILE STP00-8016-00(003), Muscogee County
 P.I. No. 350730
 SR 982/Talbotton Road/Warm Springs Road from
 7th Avenue to Woodruff/Hilton
FROM James B. Buchan, P.E., State Urban Design Engineer

OFFICE Urban Design

DATE June 27, 2008

TO Genetha Rice-Singleton, Assistant Preconstruction Director

SUBJECT **Request for Location and Design Approval**

State Route 982/Talbotton Road/Warm Springs Road in Muscogee County consists of widening between 7th Avenue and Woodruff/Hilton Avenue. The project consists of widening the existing roadway to 4 – 11-foot travel lanes, two in each direction, with a 16-foot raised median, and 12-foot shoulders with curb and gutter and 5-foot sidewalks. The project length is 1.9 miles. The project is located 100% within the second U.S. Congressional District of the State of Georgia, Muscogee County, Georgia Militia District 921.

Concept Approval Date: August 31, 1999

Concept Update: N/A

Environmental Assessment and Reassessment Approval Date: June 27, 2008

Public Involvement:

- Neighborhood Open House
 - A Neighborhood Open House was held March 18, 2008 at Hannan Elementary School.
 - 41 people attended, a total of 19 comments were received.
 - 9 supported the project; 3 were conditional; 3 were opposed; 4 were uncommitted.
 - There were a few property owners concerned about the required right-of-way impacts. There were also 2 comments regarding a 3-lane concept with roundabouts. The major change as a result of the public opinion was to remove the cul-de-sac at 27th Ave, which was a suggestion from the VE study, and return it to a right-in/right-out intersection.
- Hearing Result
 - A PHOH was held on August 12, 2004 at Hannan Elementary School.
 - 146 people attended, a total of 34 comments were received.
 - 18 supported the project; 7 were opposed; 9 were conditional.
 - There were 15 comments stating concerns about impacts to businesses and residences due to right-of-way acquisition and access issues due to proposed median. Five comments made suggestions for bicyclist and pedestrian accommodations.

- Public Information Meeting
 - A PIOH was held February 24, 1999.
 - 109 people attended, a total of 47 comments were received.
 - 24 supported the project, 14 were opposed; 9 were conditional
 - There were several comments stating concerns about impacts to businesses and residences due to right-of-way acquisition and access issues due to proposed raised median.

Consistency with Approved Planning:

The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: Urban Design recommends that the location and design for the project be approved and that the attached Notice be approved for advertising.

RECOMMENDED: _____


Director of Preconstruction

APPROVED: _____



Chief Engineer

6/26/09

Date of Approval

JBB:JLF


Attachments:

Project Location Map

Cost Estimate

Notice of Location and Design Approval


Location Map

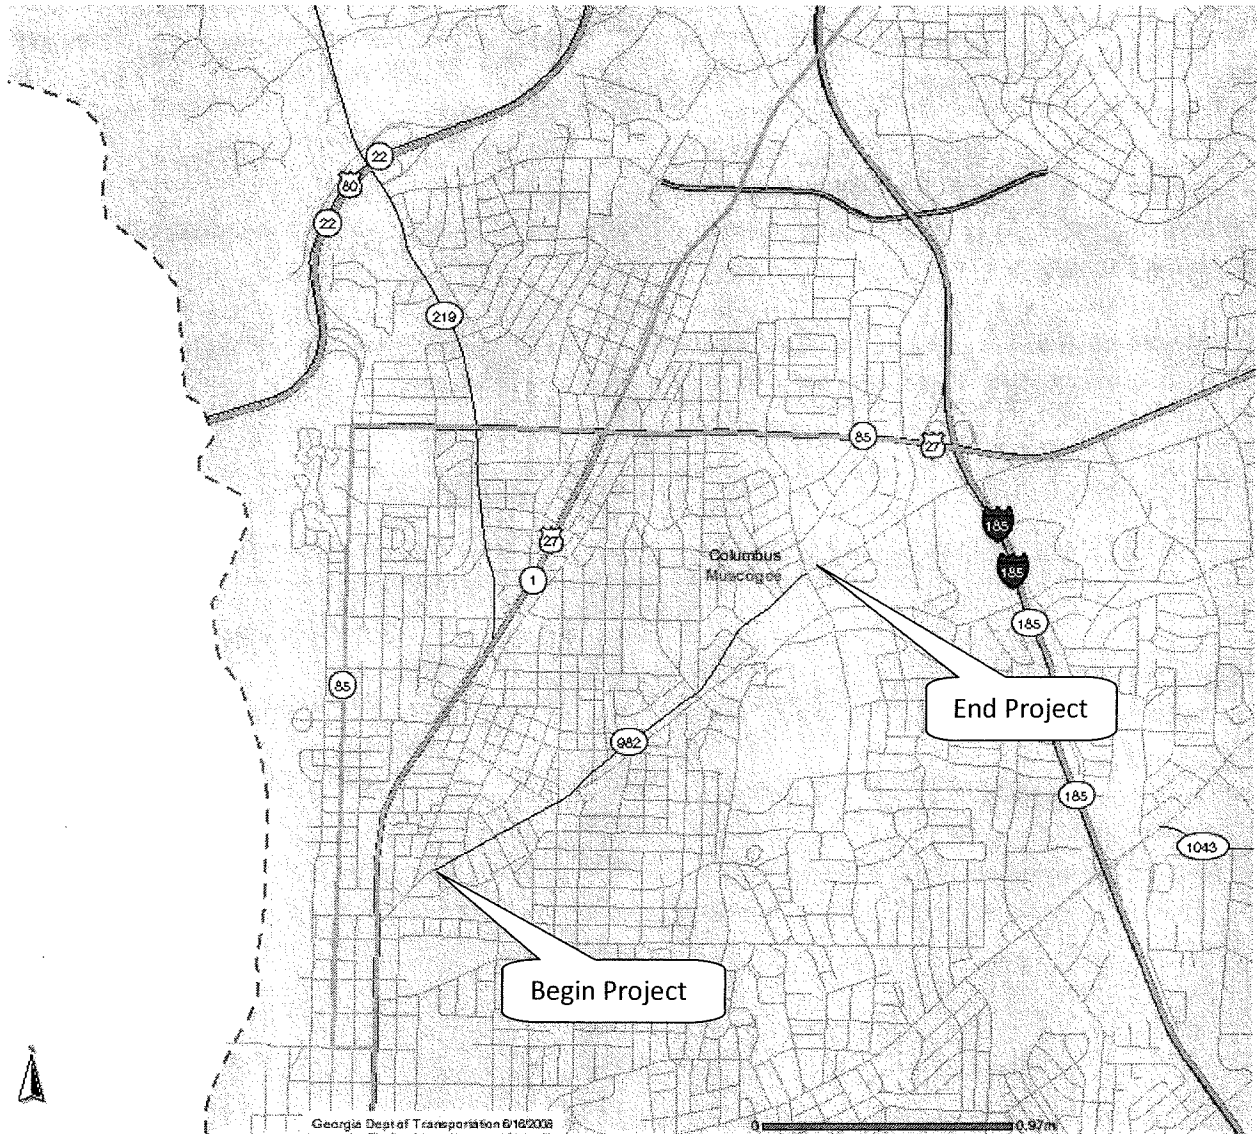

Talbotton Road/Warm Springs Road

STP00-8016-00(003); PI # 350730; Muscogee County

Location Map

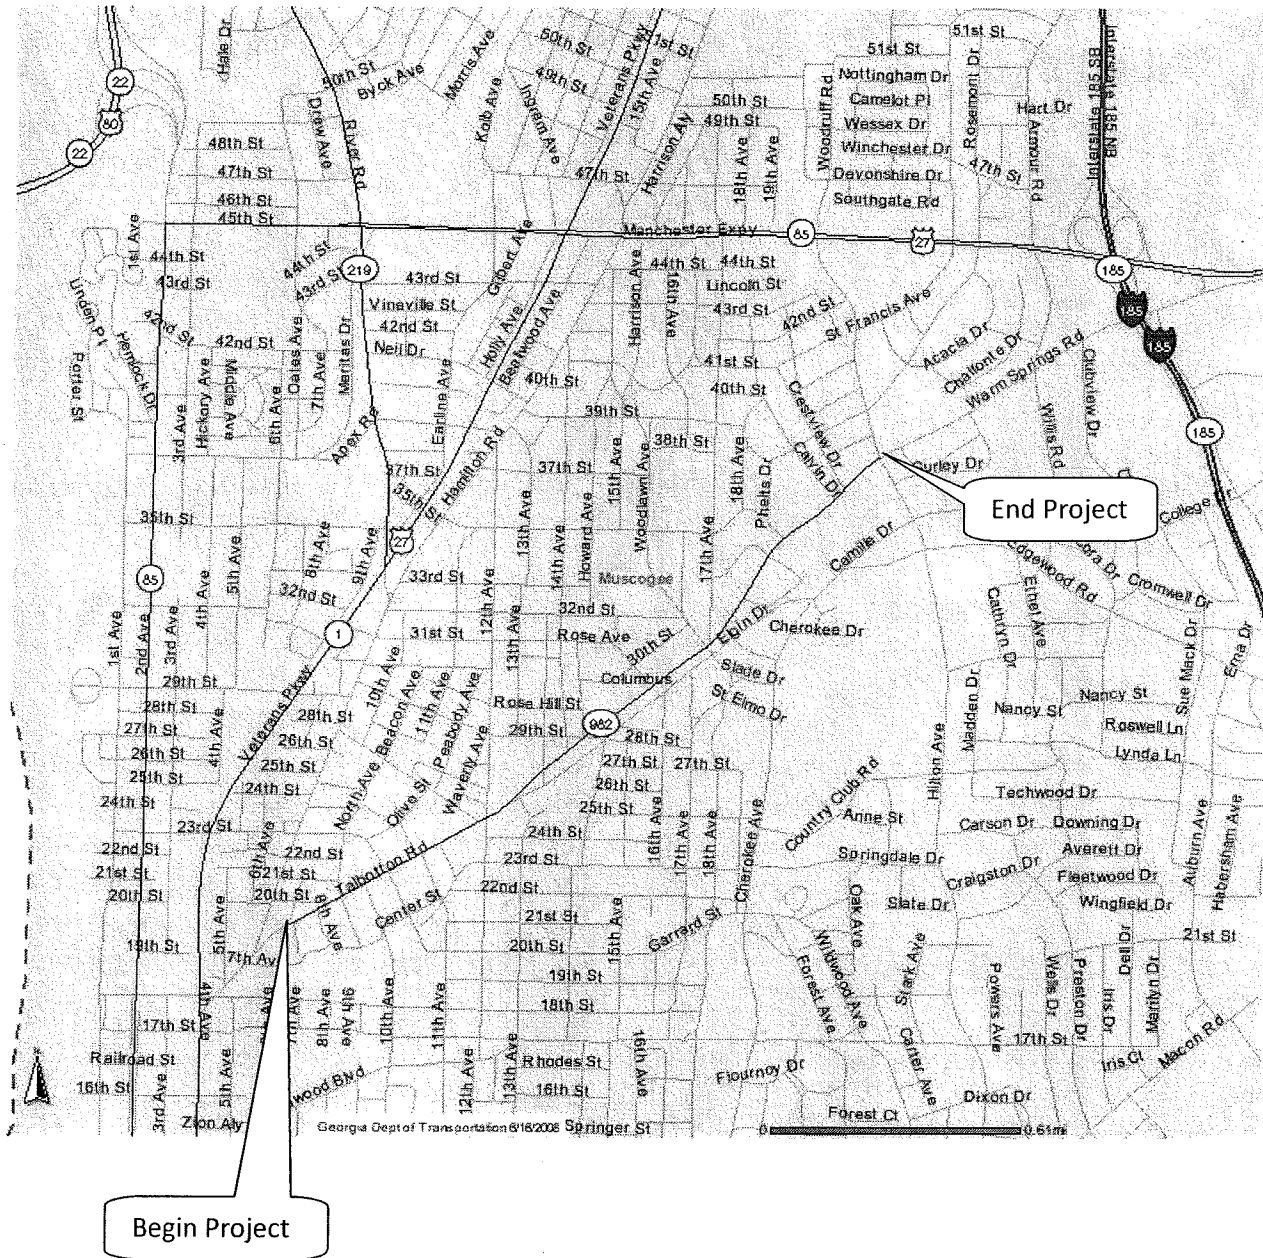

Talbotton Road/Warm Springs Road

STP00-8016-00(003); PI # 350730; Muscogee County

SUMMARY

Date: 17-Jun-08
Project # STP00-8016-00(003)
County: Muscogee
Project Description: SR 982/Talbotton Road/Warm Springs from from 7th Ave to Woodruff/Hilton
PI # 350730
Alternate:
Estimate For - L&D

	<u>Estimate</u>	<u>COMMENTS</u>
CONSTRUCTION COST (w/o 10% E&C)	\$16,631,900.00	SEE ATTACHED CONSTRUCTION COST ESTIMATE
ENGINEERING & INSPECTION (5%)	\$831,595.00	
CONSTRUCTION CONTINGENCY (6%)	\$997,914.00	Reconstruction and added capacity
UTILITY COST	\$1,262,500.00	See attached utility cost estimate
UTILITY CONTINGENCY (30%)	\$378,750.00	See attached utility cost estimate
TOTAL	<u>\$20,102,659.00</u>	
	\$20,103,000.00	

Prepared by: Jill Franks

Estimate Report for file "PI 350730"**Section Roadway Items**

Item Number	Quantity	Units	Unit Price	Item Description	Cost
150-1000	1	LS	700000.00	TRAFFIC CONTROL - STP00-8016-00(003)	700000.00
150-5010	4	EA	11824.76	TRAFFIC CONTROL, PORTABLE IMPACT ATTENUATOR	47299.04
153-1300	1	EA	95075.62	FIELD ENGINEERS OFFICE TP 3	95075.62
210-0100	1	LS	1150000.00	GRADING COMPLETE - STP00-8016-00(003)	1150000.00
310-1101	60000	MG	40.00	GR AGGR BASE CRS, INCL MATL	2400000.00
402-1812	1000	MG	92.18	RECYCLED ASPH CONC LEVELING, INCL BITUM MATL & H LIME	92180.00
402-3121	19230	MG	79.31	RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME	1525131.30
402-3190	25645	MG	69.52	RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	1782840.40
402-3250	38465	MG	65.84	RECYCLED ASPH CONC 25 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	2532535.60
413-1000	359350	L	2.00	BITUM TACK COAT	718700.00
441-0104	9800	M2	35.26	CONC SIDEWALK, 100 MM	345548.00
441-0740	600	M2	43.05	CONCRETE MEDIAN, 100 MM	25830.00
441-4050	700	M2	66.50	CONC VALLEY GUTTER WITH CURB, 200 MM	46550.00
441-6222	18800	LM1	54.13	CONC CURB & GUTTER, 200 MM X 750 MM, TP 2	1017644.00
500-3107	400	M3	592.91	CLASS A CONCRETE, RETAINING WALL	237164.00
500-9999	10	M3	301.30	CLASS B CONC, BASE OR PVMT WIDENING	3013.00
620-0100	300	LM1	145.51	TEMPORARY BARRIER, METHOD NO. 1	43653.00
634-1200	1200	EA	98.13	RIGHT OF WAY MARKERS	117756.00
635-1000	15	LM	31.00	BARRICADE	465.00
Section Sub Total:					\$12,881,384.96

Section Erosion Control

Item Number	Quantity	Units	Unit Price	Item Description	Cost
163-0232	25	HA	2104.60	TEMPORARY GRASSING	52615.00
167-1000	1	EA	890.75	WATER QUALITY MONITORING AND SAMPLING	890.75
167-1500	30	MO	988.74	WATER QUALITY INSPECTIONS	29662.20
700-6910	25	HA	3128.13	PERMANENT GRASSING	78203.25
XXX-XXXX	1	Lump Sum	400000.00	EROSION CONTROL	400000.00
Section Sub Total:					\$561,371.20

Section Signing and Marking

Item Number	Quantity	Units	Unit Price	Item Description	Cost
XXX-XXXX	3	km	75000.00	Signing and Striping	225000.00
Section Sub Total:					\$225,000.00

Section Signal

Item Number	Quantity	Units	Unit Price	Item Description	Cost
647-1000	8	LS	120000.00	TRAFFIC SIGNAL INSTALLATION NO - 1- 8	960000.00
Section Sub Total:					\$960,000.00

Section Drainage

Item Number	Quantity	Units	Unit Price	Item Description	Cost
550-1150	1775	LM1	180.00	STORM DRAIN PIPE, 375 MM, H 0.3 - 3 M	319500.00
550-1180	2843	LM1	134.54	STORM DRAIN PIPE, 450 MM, H 0.3 - 3 M	382497.22
550-1240	470	LM1	169.89	STORM DRAIN PIPE, 600 MM, H 0.3 - 3 M	79848.30
550-1300	205	LM1	231.36	STORM DRAIN PIPE, 750 MM, H 0.3 - 3 M	47428.80
550-1360	343	LM1	264.14	STORM DRAIN PIPE, 900 MM, H 0.3 - 3 M	90600.02
550-1420	65	LM1	337.01	STORM DRAIN PIPE, 1050 MM, H 0.3 - 3 M	21905.65
550-1480	16	LM1	621.84	STORM DRAIN PIPE, 1200 MM, H 0.3 - 3 M	9949.44
550-1540	64	LM1	627.77	STORM DRAIN PIPE, 1350 MM, H 0.3 - 3 M	40177.28
550-4124	3	EA	344.55	FLARED END SECTION 600 MM, SIDE DRAIN	1033.65
668-1100	137	EA	2723.44	CATCH BASIN, GP 1	373111.28
668-2100	43	EA	4388.89	DROP INLET, GP 1	188722.27
668-4300	63	EA	2680.95	STORM SEWER MANHOLE, TP 1	168899.85
668-5000	5	EA	2087.50	JUNCTION BOX	10437.50
Section Sub Total:					\$1,734,111.26


Total Estimated Cost: \$16,361,867.42

USE: \$ 16,361,900.00

BUCHAN: Neal
BOWMAN: _____
RICHARDS: _____
OTHER: _____
GROUPS: _____
FILE: _____

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

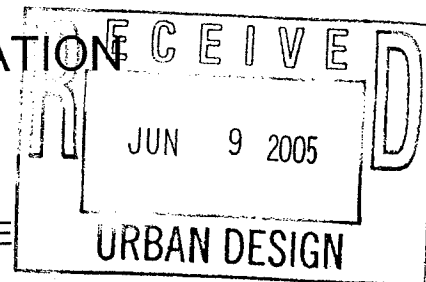

FILE **STP-8016(3), Muscogee County, P.I. # 350730**
Talbotton Road Widening, 7th Ave to Woodruff/Hilton

OFFICE Thomaston

DATE June 8, 2005

FROM Thomas B. Howell, P.E., District Engineer

TO Ben Buchan, P.E., State Urban Design Engineer
Attn: Neal O'Brien

SUBJECT **UTILITY COST ESTIMATE**

The following is a ballpark utility cost estimate for facilities located within the scope of the above referenced project.

UTILITY OWNER	PUBLIC OR PRIVATE	TYPE OF UTILITY	REIMBURSABLE	NON-REIMBURSABLE
Atmos Energy	Private	Nat Gas	0	450,350
BellSouth	Private	Tel.Comm	0	2,201,211
Charter Communications	Private	TV	0	79,815
Columbus Water Works	Private	Water/Sewer	0	3,655,153
Georgia Power Distribution	Private	Electric	1,262,500	0
Knology	Private	TV	0	80,000
TOTAL PROJECT COST			\$1,262,500	\$6,466,529

If you have any questions, please call Kim Brown at 706-646-6548.

KMG:KB:pls

cc: Elaine Jackson, Secretary to Jeff Baker, P.E., State Utilities Engineer (via: e-mail)
Brent D'Angelo, P.E., Asst. State Utilities Engineer (via: e-mail)
Terry Brigman, State Utilities Preconstruction Engineer (via: e-mail)

NOTICE OF LOCATION AND DESIGN APPROVAL

**STP00-8016-00(003), Muscogee County
P.I. No. 350730**

Notice is hereby given in compliance with Georgia Code 22-2-109 that the Georgia Department of Transportation has approved the Location and Design of the above project.

Date of Location and Design Approval: JUNE 27, 2008

SR 982/Talbotton Road/Warm Springs Road in Muscogee County consists of widening between 7th Avenue and Woodruff/Hilton Avenue. The project consists of widening the existing roadway to 4 – 11-foot travel lanes, two in each direction, with a 16-foot raised median, and 12-foot shoulders with curb and gutter and 5-foot sidewalks. The project length is 1.9 miles. The project is located 100% within the second U.S. Congressional District of the State of Georgia, Muscogee County, Georgia Militia District 921.

Drawings or maps or plats of the proposed project, as approved, are on file and are available for public inspection at the Georgia Department of Transportation:

**Wayne Pittman, District 3, Area 7 Engineer
Department of Transportation
3600 Schatulga Road
Columbus, GA 31907
(706) 568-2165
wpittman@dot.ga.gov**

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and requesting in writing to:

**Neal O'Brien, Office of Urban Design
Department of Transportation
No. 2 Capitol Square
Atlanta, GA 30334
(404) 631-1725
nobrien@dot.ga.gov**

Any written request or communication in reference to this project or notice SHOULD include the Project and P.I. Numbers as noted at the top of this notice.