ORIGINAL TO GENERAL FILES

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

FILE P. I. No. 720125-, Cobb/Fulton Counties
BHFST-0001-05(024)
SR 3 FM Northgate Drive to Paces Mill Road Phase I

OFFICE Program Control

DATE December 21, 2009

FROM Genetha Rice-Singleton, Program Control Administrator

TO SEE DISTRIBUTION

SUBJECT APPROVED NOTICE OF LOCATION AND DESIGN

Attached is the approved Location and Design Report for the above subject project.

Also attached is the Notice of Location and Design Approval. This is the Authorization for the District to proceed with advertisement

Attachment

DISTRIBUTION:

Ron Wishon
Glenn Bowman
Ken Thompson
Michael Henry
Keith Golden
Angela Alexander
Paul Liles
Bobby Hilliard
Mike Lobdell
Bryant Poole

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

INTERDEPARTMENT CORRESPONDENCE

FILE	BHFST-0001-05(024) Cobb/Fulton County PI # 720125 SR 3 FM Northgate Dr. to Paces Mill Rd. PH I	**OFFICE** **DATE**	Program Delivery November 9, 2009

FROM Bobby Hilliard, P.E., State Program Delivery Engineer B.H.

TO Genetha Rice-Singleton, Program Control Administrator

SUBJECT **Request for Location and Design Approval**

Description and Project Proposal: The project consists of the widening and reconstruction of US 41/SR 3, an urban principal arterial, from Northgate Drive in Fulton County to Paces Mill Road in Cobb County, including the reconstruction of the bridge over the Chattahoochee River. The length of the project is approximately 0.53 miles. It should be noted that the local street name changes at the county line from Northside Parkway in Fulton County to Cobb Parkway in Cobb County. The Chattahoochee River serves as the division between the two counties.

The existing roadway currently consists of four lanes with a variable width, two-way left turn lane and right turn lanes at most major intersections. The proposed project would widen US 41/SR 3 to a 6-lane urban facility with a 20-ft raised median, a 12-ft multi-use path on the east side of US 41/SR 3, and a 5-ft sidewalk on the west side of US 41/SR 3. The project would also replace the existing bridge over the Chattahoochee River. The existing bridge is in need of replacement due to low sufficiency rating of 47, age of the bridge (originally constructed in 1935), and insufficient width to carry projected traffic volumes.

Concept Approval Date: June 24, 2009

Environmental Assessment and Reassessment Approval Date: December 22, 1997

Public Involvement:

- Public Information/Open house Meeting
  - A Public Information/Open house was held on July 7, 2009.
  - Number in attendance: 15
  - Number of individuals for the Project: 3
  - Number of individuals against the Project: 0
  - Number of individuals uncommitted to the Project: 0
  - Number of individuals conditionally committed to the Project: 1
  - Number of comments received: 0

  - A Public Information/Open house was held on October 29, 1997.
  - Number of individuals for the Project: 5
  - Number of individuals against the Project: 2
  - Number of individuals uncommitted to the Project: 2
  - Number of individuals conditionally committed to the Project: 2

- Officials in Attendance: David Jackson, Cobb County DOT

Consistency with Approved Planning:
The design description as presented herein and submitted for approval is consistent with the approved Concept Report.

Recommendations: Recommend that the location and design and concept update for the project be approved and that the attached Notice be approved for advertising.

RECOMMEND: _____
~~Program Control Administrator~~
DIRECTOR OF ENGINEERING -

APPROVE: _____ 12/20/09
Chief Engineer Date of Approval

BKH: ~~SH~~ S.H.: TWM

Attachments:

- Sketch Map
- Cost Estimate
- Notice of Location and Design Approval

NOTICE OF LOCATION AND DESIGN APPROVAL

Project Number: BHFST-0001-05(024)
Fulton/Cobb Counties
P. I. NUMBER: 720125

Notice is hereby given in compliance with Georgia Code 22-2-109 that the Georgia Department of Transportation has approved the Location and Design of this project.

The date of Location and Design approval is DECEMBER 21, 2009

The proposed project consists of the widening and reconstruction of US 41/SR 3, an urban principal arterial, from Northgate Drive in Fulton County to Paces Mill Road in Cobb County, including the reconstruction of the bridge over the Chattahoochee River. The length of the project is approximately 0.53 miles. It should be noted that the local street name changes at the county line from Northside Parkway in Fulton County to Cobb Parkway in Cobb County. The Chattahoochee River serves as the division between the two counties.

The existing roadway currently consists of four lanes with a variable width, two-way left turn lane and right turn lanes at most major intersections. The proposed project would widen US 41/SR 3 to a 6-lane urban facility with a 20-ft raised median, a 12-ft multi-use path on the east side of US 41/SR 3, and a 5-ft sidewalk on the west side of US 41/SR 3. The project would also replace the existing bridge over the Chattahoochee River. The existing bridge is in need of replacement due to low sufficiency rating of 47, age of the bridge (originally constructed in 1935), and insufficient width to carry projected traffic volumes.

This project is located 46 percent within Fulton County and Congressional District No. 5, and 54 percent within Cobb County and Congressional District No. 6.

Drawings, maps or plats of the proposed project, as approved, are on file and are available for public inspection at the Georgia Department of Transportation:

Sebastian Nesbitt, Area Two Engineer
snesbitt@dot.ga.gov
1269 Kennestone Circle
Marietta, GA 30066
(404) 528-3416

Any interested party may obtain a copy of the drawings or maps or plats or portions thereof by paying a nominal fee and submitting a written request to:

Mr. Brad Hale
Moreland Altobelli Associates, Inc.
2211 Beaver Ruin Road, Suite 190
Norcross, GA 30071
E-mail Address: bhale@maai.net
Telephone: 770-263-5945

Any written request or communication in reference to this project or notice SHOULD include the Project and P. I. Numbers as noted at the top of this notice.

Project Number: BHFST-0001-05(024)
Counties: Cobb & Fulton
P. I. Number: 720125

Project Location Map

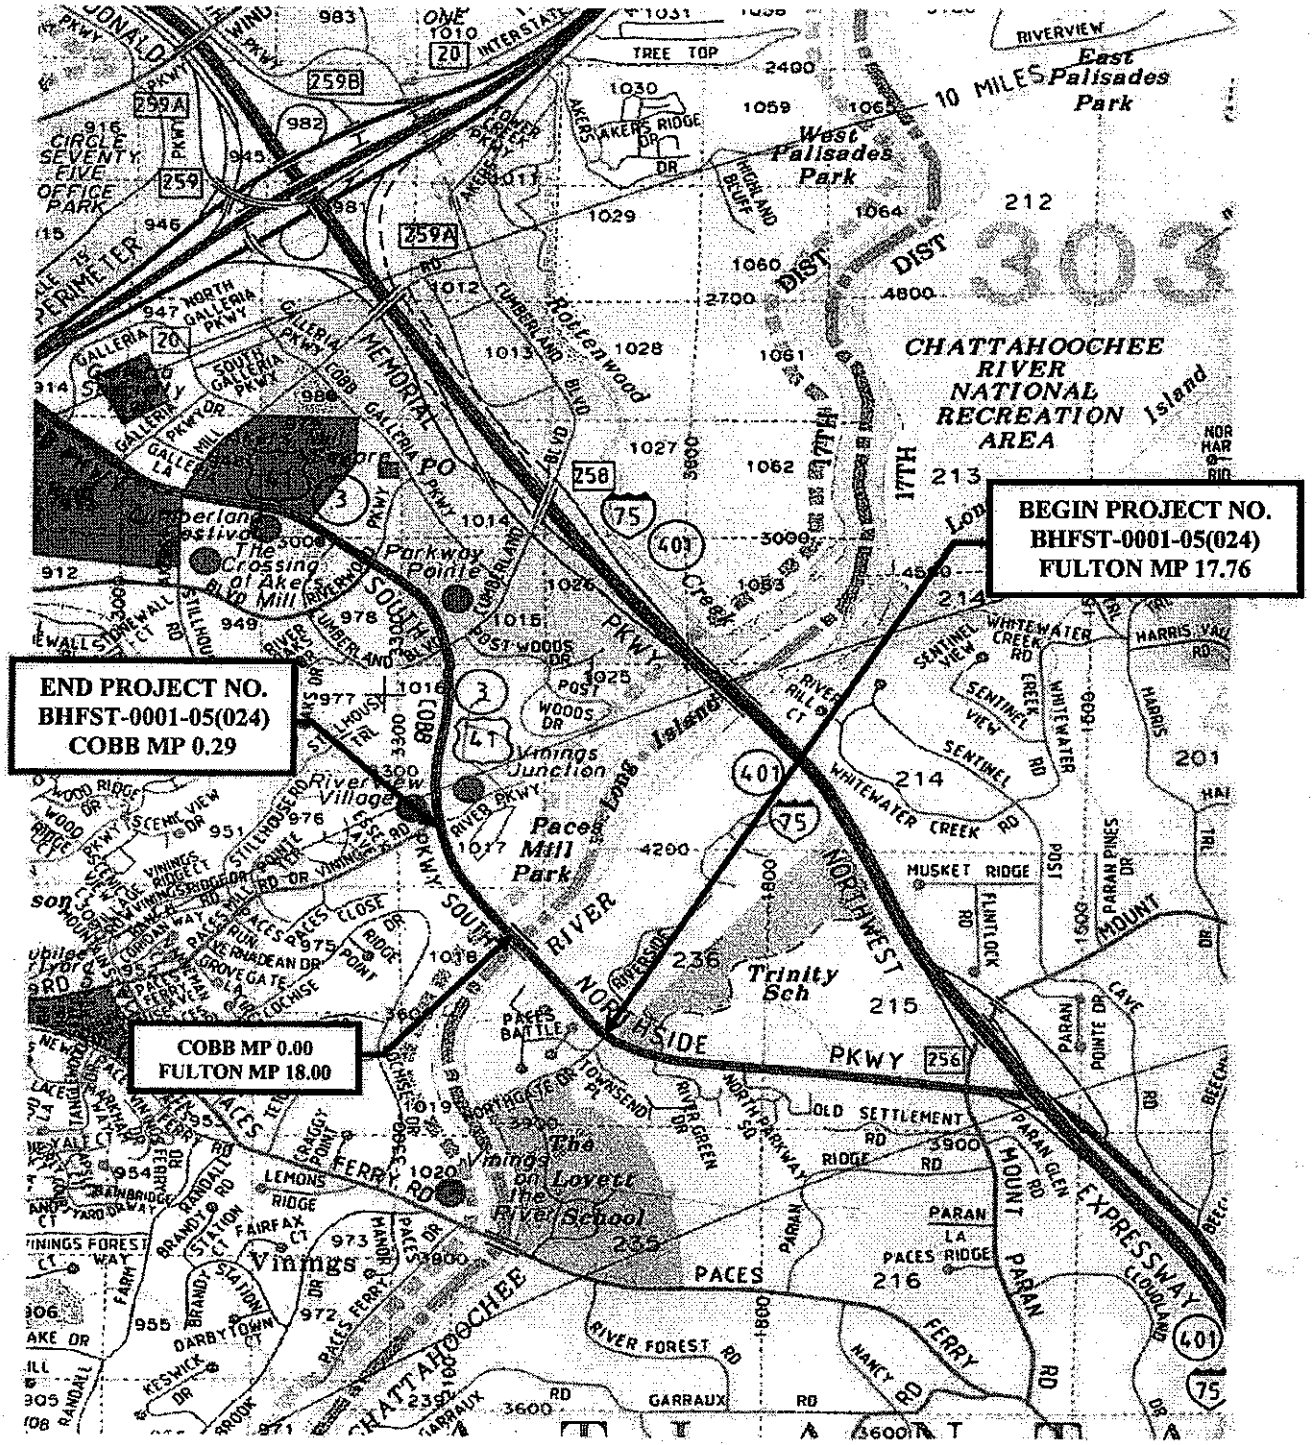

Estimate Report for file 720125 Phase 1 (US41 FROM NORTHGATE DR. TO PACES MILL RD)

Section ROADWAY

Item Number	Quantity	Units	Unit Price	Item Description	Cost
150-1000	1	LS	150000.00	TRAFFIC CONTROL -	150000.00
153-1300	1	EA	69627.91	FIELD ENGINEERS OFFICE TP 3	69627.91
210-0100	1	LS	390002.00	GRADING COMPLETE -	390002.00
310-1101	7102	TN	17.85	GR AGGR BASE CRS, INCL MATL	126770.70
402-1812	1551	TN	69.52	RECYCLED ASPH CONC LEVELING, INCL BITUM MATL & H LIME	107825.52
402-3121	3866	TN	59.88	RECYCLED ASPH CONC 25 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME	231496.08
402-3130	2249	TN	63.46	RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME	142721.54
402-3190	7496	TN	68.49	RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2,INCL BITUM MATL & H LIME	513401.04
413-1000	1569	GL	2.13	BITUM TACK COAT	3341.97
432-0206	18470	SY	1.62	MILL ASPH CONC PVMT, 1 1/2 IN DEPTH	29921.40
433-1100	730	SY	152.73	REINF CONC APPROACH SLAB, INCL CURB	111492.90
441-0104	5374	SY	33.78	CONC SIDEWALK, 4 IN	181533.72
441-0754	2314	SY	62.93	CONCRETE MEDIAN, 7 1/2 IN	145620.02
441-4030	56	SY	46.16	CONC VALLEY GUTTER, 8 IN	2584.96
441-6222	4518	LF	16.15	CONC CURB & GUTTER, 8 IN X 30 IN, TP 2	72965.70
500-3101	136	CY	287.52	CLASS A CONCRETE	39102.72
500-3200	8	CY	412.45	CLASS B CONCRETE	3299.60
511-1000	15978	LB	0.90	BAR REINF STEEL	14380.20
550-1180	2685	LF	36.84	STORM DRAIN PIPE, 18 IN, H 1-10	98915.40
550-1240	665	LF	44.71	STORM DRAIN PIPE, 24 IN, H 1-10	29732.15
550-1360	169	LF	66.08	STORM DRAIN PIPE, 36 IN, H 1-10	11167.52
550-4218	2	EA	617.22	FLARED END SECTION 18 IN, STORM DRAIN	1234.44
550-4236	1	EA	1079.94	FLARED END SECTION 36 IN, STORM DRAIN	1079.94
668-1100	33	EA	2471.01	CATCH BASIN, GP 1	81543.33
668-2100	5	EA	2488.45	DROP INLET, GP 1	12442.25
668-4300	4	EA	2332.11	STORM SEWER MANHOLE, TP 1	9328.44
				Section Sub Total:	**$2,581,531.45**

Section WALL NO. 1

Item Number	Quantity	Units	Unit Price	Item Description	Cost
621-4085	455	LF	60.20	CONCRETE SIDE BARRIER, TYPE 7W	27391.00
627-1000	4164	SF	40.95	MSE WALL FACE, 0 - 10 FT HT, WALL NO - 1	170515.80
627-1010	1975	SF	41.71	MSE WALL FACE, 10 - 20 FT HT, WALL NO - 1	82377.25
627-1100	455	LF	68.98	COPING A, WALL NO - 1	31385.90
				Section Sub Total:	**$311,669.95**

Section WALL NO. 2

Item Number	Quantity	Units	Unit Price	Item Description	Cost
621-4061	52	LF	515.00	CONC SIDE BARRIER, TP 6A	26780.00
621-4085	571	LF	60.20	CONCRETE SIDE BARRIER, TYPE 7W	34374.20
627-1000	522	SF	40.95	MSE WALL FACE, 0 - 10 FT HT, WALL NO -	21375.90
627-1010	8329	SF	41.71	MSE WALL FACE, 10 - 20 FT HT, WALL NO -	347402.59
627-1100	571	LF	68.98	COPING A, WALL NO - 2	39387.58
				Section Sub Total:	**$469,320.27**

Section WALL NO. 3

Item Number	Quantity	Units	Unit Price	Item Description	Cost
515-2020	133	LF	38.90	GALV STEEL PIPE HANDRAIL, 2 IN, ROUND	5173.70
627-1000	1660	SF	40.95	MSE WALL FACE, 0 - 10 FT HT, WALL NO -	67977.00
627-1160	133	LF	269.10	TRAFFIC BARRIER H, WALL NO. 3	35790.30
				Section Sub Total:	**$108,941.00**

Section WALL NO. 4

Item Number	Quantity	Units	Unit Price	Item Description	Cost
515-2020	51	LF	38.90	GALV STEEL PIPE HANDRAIL, 2 IN, ROUND	1983.90

621-4061	70	LF	515.00	CONC SIDE BARRIER, TP 6A	36050.00
621-4085	528	LF	60.20	CONCRETE SIDE BARRIER, TYPE 7W	31785.60
627-1000	8733	SF	40.95	MSE WALL FACE, 0 - 10 FT HT, WALL NO -	357616.35
627-1010	422	SF	41.71	MSE WALL FACE, 10 - 20 FT HT, WALL NO -	17601.62
627-1100	551	LF	68.98	COPING A, WALL NO - 4	38007.98
627-1160	51	LF	269.10	TRAFFIC BARIER H, WALL NO. 4	13724.10
				Section Sub Total:	**$496,769.55**

Section WALL NO. 5

Item Number	Quantity	Units	Unit Price	Item Description	Cost
621-4085	105	LF	60.20	CONCRETE SIDE BARRIER, TYPE 7W	6321.00
627-1000	355	SF	40.95	MSE WALL FACE, 0 - 10 FT HT, WALL NO - 5	14537.25
627-1100	105	LF	68.98	COPING A, WALL NO - 5	7242.90
				Section Sub Total:	**$28,101.15**

Section BRIDGE

Item Number	Quantity	Units	Unit Price	Item Description	Cost
211-0200	1370	CY	34.73	BRIDGE EXCAVATION, GRADE SEPARATION	47580.10
211-0300	1600	CY	29.64	BRIDGE EXCAVATION, STREAM CROSSING	47424.00
441-0004	213	SY	44.29	CONC SLOPE PAV, 4 IN	9433.77
500-0100	4829	SY	4.72	GROOVED CONCRETE	22792.88
500-1006	2253	LS	733.31	SUPERSTR CONCRETE, CL AA, BR NO -	1652147.43
500-2110	1060	LF	222.25	CONCRETE PARAPET, SPCL DESIGN	235585.00
500-3002	1778	CY	481.65	CLASS AA CONCRETE	856373.70
500-3700	756	CY	221.63	SEAL CONC	167552.28
507-9034	9474	LF	185.45	PSC BEAMS,AASHTO,BULB TEE, 65 IN,BR NO 1	1756953.30
511-1000	331638	LB	0.90	BAR REINF STEEL	298474.20
511-3000	188951	LS	0.96	SUPERSTR REINF STEEL, BR NO -	181392.96
514-1000	160611	LS	1.19	EPOXY COATED SUPERSTR REINF STEEL, BR NO -	191127.09
520-0589	40	EA	217.08	H-PILE POINTS, HP 14 X 89	8683.20
520-1151	800	LF	90.30	PILING IN PLACE, STEEL H, HP 14 X 89	72240.00
520-4151	2	EA	1.00	LOAD TEST, STEEL H, HP 14 X 89	2.00
520-5000	70	LF	503.44	PILOT HOLES	35240.80
522-1000	1	LS	100000.00	SHORING	100000.00
525-1000	6	EA	13044.47	COFFERDAM	78266.82
540-1102	1	LS	115793.00	REMOVAL OF EXISTING BR, BR NO -	115793.00
603-2024	1129	SY	47.88	STN DUMPED RIP RAP, TP 1, 24 IN	54056.52
603-7000	1129	SY	4.34	PLASTIC FILTER FABRIC	4899.86
620-0200	550	LF	57.02	TEMPORARY BARRIER, METHOD NO. 2	31361.00
				Section Sub Total:	**$5,967,379.91**

Section SIGNING AND MARKINGS

Item Number	Quantity	Units	Unit Price	Item Description	Cost
636-1020	20	SF	16.58	HIGHWAY SIGNS, TP 1 MATL, REFL SHEETING, TP 3	331.60
636-1033	75	SF	19.98	HIGHWAY SIGNS, TP 1 MATL, REFL SHEETING, TP 9	1498.50
636-2070	20	LF	8.81	GALV STEEL POSTS, TP 7	176.20
636-2080	120	LF	11.72	GALV STEEL POSTS, TP 8	1406.40
653-0120	23	EA	74.41	THERMOPLASTIC PVMT MARKING, ARROW, TP 2	1711.43
653-1501	7000	LF	0.44	THERMOPLASTIC SOLID TRAF STRIPE, 5 IN, WHITE	3080.00
653-1502	4395	LF	0.45	THERMOPLASTIC SOLID TRAF STRIPE, 5 IN, YELLOW	1977.75
653-1704	150	LF	3.45	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	517.50
653-3501	8940	GLF	0.34	THERMOPLASTIC SKIP TRAF STRIPE, 5 IN, WHITE	3039.60
654-1001	50	EA	3.04	RAISED PVMT MARKERS TP 1	152.00
654-1003	200	EA	3.21	RAISED PVMT MARKERS TP 3	642.00
657-1085	1185	LF	5.17	PREFORMED PLASTIC SOLID PVMT MKG, 8 IN, CONTRAST (BLACK-WHITE), TP PB	6126.45

657-3085	2370	GLF	4.45	PREFORMED PLASTIC SKIP PVMT MKG, 8 IN, CONTRAST (BLACK-WHITE), TP PB	10546.50
657-6085	1185	LF	5.18	PREFORMED PLASTIC SOLID PVMT MKG, 8 IN, CONTRAST (BLACK-YELLOW), TP PB	6138.30
				Section Sub Total:	**$37,344.23**

Section SIGNALS

Item Number	Quantity	Units	Unit Price	Item Description	Cost
636-1041	130	SF	45.22	HIGHWAY SIGNS, TP 2 MATL, REFL SHEETING, TP 9	5878.60
639-3004	4	EA	13090.96	STEEL STRAIN POLE, TP IV	52363.84
639-4004	4	EA	5927.96	STRAIN POLE, TP IV	23711.84
647-1000	1	LS	60963.51	TRAFFIC SIGNAL INSTALLATION NO - 1	60963.51
647-1000	1	LS	60963.51	TRAFFIC SIGNAL INSTALLATION NO - 2	60963.51
647-2170	2	EA	1750.65	PULL BOX, PB-7	3501.30
682-6233	100	LF	2.32	CONDUIT, NONMETL, TP 3, 2 IN	232.00
935-1511	750	LF	2.08	OUTSIDE PLANT FIBER OPTIC CABLE, DROP, SINGLE MODE, 6 FIBER	1560.00
935-3602	3	EA	553.25	FIBER OPTIC CLOSURE, FDC PRE-TERMINATED, TYPE A, 6-FIBER	1659.75
935-4010	12	EA	49.10	FIBER OPTIC SPLICE, FUSION	589.20
935-8000	1	LS	2623.69	TESTING	2623.69
936-1001	1	EA	6506.50	CCTV SYSTEM, TYPE B	6506.50
936-8000	1	LS	5460.00	TESTING	5460.00
938-1100	4	EA	5282.76	INTERSECTION VIDEO DETECTION SYSTEM ASSEMBLY, TYPE A	21131.04
938-1200	1	EA	426.19	PROGRAMMING MONITOR, TYPE A	426.19
938-1210	2	EA	455.53	OUTPUT EXPANSION MODULE, TYPE A	911.06
938-8000	1	LS	1908.98	TESTING	1908.98
938-8500	1	LS	2256.90	TRAINING	2256.90
939-1190	1	EA	6734.00	VIDEO ENCODER, TYPE A	6734.00
939-1195	1	EA	5278.00	VIDEO DECODER, TYPE A	5278.00
939-2305	2	EA	2872.07	FIELD SWITCH, TYPE C	5744.14
939-4040	1	EA	1718.99	TYPE D CABINET	1718.99
				Section Sub Total:	**$272,123.04**

Section EROSION CONTROL

Item Number	Quantity	Units	Unit Price	Item Description	Cost
163-0232	1	AC	297.78	TEMPORARY GRASSING	425.83
163-0240	9	TN	164.44	MULCH	1479.96
163-0300	2	EA	1177.73	CONSTRUCTION EXIT	2355.46
165-0010	3420	LF	0.69	MAINTENANCE OF TEMPORARY SILT FENCE, TP A	2359.80
165-0030	2200	LF	0.72	MAINTENANCE OF TEMPORARY SILT FENCE, TP C	1584.00
165-0101	2	EA	482.32	MAINTENANCE OF CONSTRUCTION EXIT	964.64
167-1000	2	EA	486.85	WATER QUALITY MONITORING AND SAMPLING	973.70
167-1500	18	MO	751.23	WATER QUALITY INSPECTIONS	13522.14
171-0010	3420	LF	2.38	TEMPORARY SILT FENCE, TYPE A	8139.60
171-0030	2200	LF	3.64	TEMPORARY SILT FENCE, TYPE C	8008.00
700-6910	1	AC	754.08	PERMANENT GRASSING	1055.71
700-7000	3	TN	65.07	AGRICULTURAL LIME	195.21
700-7010	4	GL	22.09	LIQUID LIME	88.36
700-8000	1	TN	470.95	FERTILIZER MIXED GRADE	470.95
				Section Sub Total:	**$41,623.36**

Total Estimated Cost: $10,314,803.91

Subtotal Construction Cost	**$10,314,803.91**
E&C Rate 10.0 %	$1,031,480.39
Inflation Rate 0.0 % @ 0 Years	$0.00

Total Construction Cost	**$11,346,284.30**
Right Of Way	$2,700,000.00
ReImb. Utilities	$140,000.00
Grand Total Project Cost	**$14,186,284.30**

Date 5/29/2009

P.I. Number 720125 - Phase 1 County Fulton/Cobb

Project Number BHFST-0001-05 (024) - Phase 1

Special Provision, Section 109-Measurement and Payment

FUEL PRICE ADJUSTMENT (*ENGLISH 125% MAX*)

ENTER FPL DIESEL	2.373
ENTER FPM DIESEL	5.339

ENTER FPL UNLEADED	1.566
ENTER FPM UNLEADED	3.6235

http://www.dot.ga.gov/doingbusiness/Materials/Pages/asphaltcementindex.aspx

INCREASE ADJUSTMENT
125.00%

INCREASE ADJUSTMENT
125.00%

ROADWAY ITEMS	QUANTITY	DIESEL FACTOR	GALLONS DIESEL	UNLEADED FACTOR	GALLONS UNLEADED	REMARKS
Excavations paid as specified by Sections 205 (CUBIC YARD)		0.29		0.15		
Excavations paid as specified by Sections 206 (CUBIC YARD)		0.29		0.15		
GAB paid as specified by the ton under Section 310 (TON)	7102.000	0.29	2059.58	0.24	1704.48	
Hot Mix Asphalt paid as specified by the ton under Sections 400 (TON)		2.90		0.71		
Hot Mix Asphalt paid as specified by the ton under Sections 402 (TON)	15162.000	2.90	43969.80	0.71	10765.02	
PCC Pavement paid as specified by the square yard under Section 430 (SY)		0.25		0.20		

BRIDGE ITEMS	Quantity	Unit Price	QF/1000	Diesel Factor	Gallons Diesel	Unleaded Factor	Gallons Unleaded	REMARKS
Bridge Excavation (CY) Section 211	2970.00	34.73	103.1481	8.00	825.18	1.50	154.72	
Class __Concrete (CY) Section 500	1778.00	481.65	856.3737	8.00	6850.99	1.50	1284.56	Class AA
Class __Concrete (CY) Section 500	136.00	287.52	39.1027	8.00	312.82	1.50	58.65	Class A
Class __Concrete (CY) Section 500	8.00	412.45	3.2996	8.00	26.40	1.50	4.95	Class B
Superstru Con Class__(CY) Section 500	2253.00	733.31	1652.1474	8.00	13217.18	1.50	2478.22	Class AA
Superstru Con Class__(CY) Section 500	756.00	221.63	167.5523	8.00	1340.42	1.50	251.33	Seal Concrete
Superstru Con Class__(CY) Section 500				8.00		1.50		
Concrete Handrail (LF) Section 500				8.00		1.50		
Concrete Barrier (LF) Section 500				8.00		1.50		

BRIDGE ITEMS	Quantity	Unit Price	QF/1000	Diesel Factor	Gallons Diesel	Unleaded Factor	Gallons Unleaded	REMARKS
Stru Steel Plan Quantity (LB) Section 501				8.00		1.50		
Stru Steel Plan Quantity (LB) Section 501				8.00		1.50		
PSC Beams_____ (LF) Section 507	9474.00	185.45	1756.9533	8.00	14055.63	1.50	2635.43	65 IN
PSC Beams_____ (LF) Section 507				8.00		1.50		
PSC Beams_____ (LF) Section 507				8.00		1.50		
Stru Reinf Plan Quantity(LB) Section 511				8.00		1.50		
Stru Reinf Plan Quantity(LB) Section 511				8.00		1.50		
Bar Reinf Steel (LB) Section 511	347616.00	0.90	312.8544	8.00	2502.84	1.50	469.28	
Piling___inch (LF) Section 520	800.00	90.30	72.2400	8.00	577.92	1.50	108.36	Steel H, HP 14 X 89
Piling___inch (LF) Section 520				8.00		1.50		
Piling___inch (LF) Section 520				8.00		1.50		
Piling___inch (LF) Section 520				8.00		1.50		
Piling___inch (LF) Section 520				8.00		1.50		
Piling___inch (LF) Section 520				8.00		1.50		
Drilled Caisson,___ (LF) Section 524				8.00		1.50		
Drilled Caisson,___ (LF) Section 524				8.00		1.50		
Drilled Caisson,___ (LF) Section 524				8.00		1.50		
Pile Encasement,___(LF) Section 547				8.00		1.50		
Pile Encasement,___(LF) Section 547				8.00		1.50		

SUM QF DIESEL=	85738.75	SUM QF UNLEADED=	19915.01

DIESEL PRICE ADJUSTMENT($)	$233,976.77
UNLEADED PRICE ADJUSTMENT($)	$35,864.94

ASPHALT CEMENT PRICE ADJUSTMENT
(BITUMINOUS TACK COAT 125% MAX)

APPLICABLE TO CONTRACTS/PROJECTS CONTAINING THE 413 SPECIFICATION, SECTION 413.5.01 ADJUSTMENTS ASPHALT PRICE ADJUSTMENT FOR BITUMINOUS TACK COAT

http://www.dot.ga.gov/doingbusiness/Materials/Pages/asphaltcementindex.aspx

ENTER APL 450 **ENTER APM** 1012.5

125.00%	INCREASE ADJUSTMENT

L.I.N.	TYPE	TACK (GALLONS)	TACK (TONS)	REMARKS
413-1000	PG 58-22	1569	6.7390	

TMT = 6.7390

PRICE ADJUSTMENT($)	$3,639.07

400 / 402 ASPHALT CEMENT PRICE ADJUSTMENT 125% MAX

ENTER APL 450 **ENTER APM** 1012.5

http://www.dot.ga.gov/doingbusiness/Materials/Pages/asphaltcementindex.aspx

125.00%	INCREASE ADJUSTMENT

L.I.N. / Spec Number	MIX TYPE	HMA	JMF AC%	AC	REMARKS
402-1812	12.5 mm SP	1551	5.00	77.55	Leveling
402-3121	25 mm SP	3866	5.00	193.30	
402-3130	12.5 mm SP	2249	5.00	112.45	
402-3190	19 mm SP	7496	5.00	374.80	
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			5.00		
			TMT =	758.10	

PRICE ADJUSTMENT($)	$409,374.00

ASPHALT CEMENT PRICE ADJUSTMENT FOR TACK COAT(Surface Treatment 125% MAX)

BITUMINOUS

APPLICABLE TO CONTRACTS CONTAINING THE 413 SPEC. SECTION 413.5.01 ADJUSTMENTS ASPHALT PRICE ADJUSTMENT FOR BITUMINOUS TACK COAT

http://www.dot.ga.gov/doingbusiness/Materials/Pages/asphaltcementindex.aspx

ENTER APL 450 ENTER APM 1012.5

125.00%	INCREASE ADJUSTMENT

Use this side for Asphalt Emulsion Only

L.I.N.	TYPE	ASPHALT EMULSION (GALLONS)

TMT =

REMARKS:

Use this side for Asphalt Cement Only

L.I.N.	TYPE	TACK (GALLONS)
413-1000	PG 58-22	1569

TMT = 6.7390

REMARKS:

MONTHLY PRICE ADJUSTMENT($)	$3,639.07

ADJUSTMENT SUMMARY

FUEL PRICE ADJUSTMENT (*ENGLISH 125% MAX)*

DIESEL PRICE ADJUSTMENT($)	$233,976.77
UNLEADED PRICE ADJUSTMENT($)	$35,864.94
ASPHALT CEMENT PRICE ADJUSTMENT (BITUMINOUS TACK COAT 125% MAX)	$3,639.07
400 / 402 ASPHALT CEMENT PRICE ADJUSTMENT 125% MAX	$409,374.00
ASPHALT CEMENT PRICE ADJUSTMENT FOR BITUMINOUS TACK COAT(Surface Treatment 125% MAX)	$3,639.07

REMARKS:

TOTAL ADJUSTMENTS	$686,493.84

DWM 10/08